

1 Gigabit Bypass TAP Media Converter




Works with Tipping Point


S2600NX


S5200NX S6200NX S7100NX

S7500NX

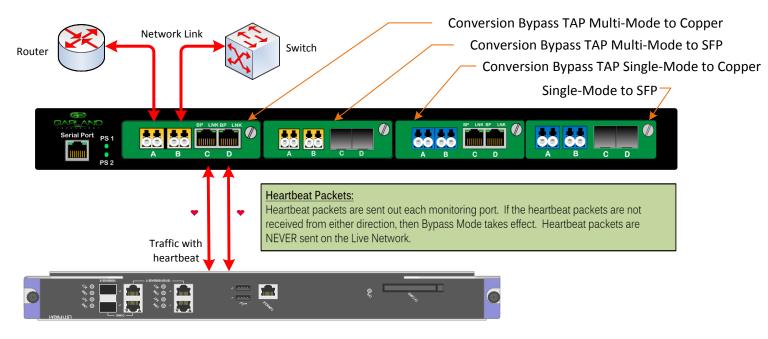

Traffic Flow





Conversions

- 1000Base-SX to 1000Base-TX
- 1000Base-LX to 1000Base-TX

If your customer requires

- 100% Network Uptime
- · Ability to take Tipping Point appliance off-line anytime
 - For maintenance and upgrades
 - Troubleshooting
 - Replace or reboot anytime
- Configurable bypass TAP breakout, aggregation, regeneration or bypass mode

Part Numbers:

Chassis

M1G1ACS 1U Modular Chassis, Dual AC PSU – supports 4 TAP Modules
M1G1DCS 1U Modular Chassis, Dual DC -48vdc PSU – supports 4 TAP Modules

Breakout, Aggregation, Regeneration/Span, Bypass TAP Modules

M1GCCBP 1Gbps 2 Copper RJ-45 TAP Ports / 2 Copper RJ-45 Monitoring Ports

M1GCSBP 1Gbps 2 Copper RJ-45 TAP Ports / 2 SFP Monitoring Ports

M1GMCBP 1Gbps 2 Multi Mode Fiber TAPs / 2 Copper RJ-45 Monitoring Port

M1GMSBP 1Gbps 2 Multi Mode Fiber TAPs / 2 SFP Monitoring Ports

M1GSCBP 1Gbps 2 Single Mode Fiber TAPs/ 2 Copper RJ-45 Monitoring Port

M1GSSBP 1Gbps 2 Single Mode Fiber TAPs/ 2 SFP Monitoring Ports

This Document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. Copyright 2012 Garland Technology LLC. All rights reserved.