


AF10G72AC

I2GRE Encapsulate


Overview:

When a packet is encapsulated with a I2GRE header the new I2GRE header segments are added to the original packet. The I2GRE header segments consists of Ethernet II, IPv4 and I2GRE as shown below.

Original Packet



I2GRE Encapsulated Packet

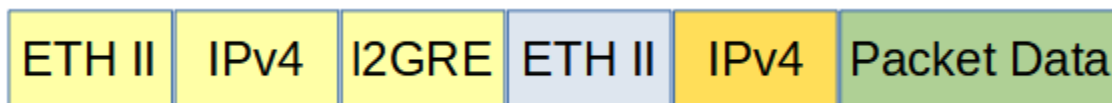

Encapsulating a packet with a I2GRE header involves two configuration processes.


1. Create a Flow
2. Create a Tap Group

1. Create a Flow

The flow defines which packets will be encapsulated with an I2GRE header. Packets that do not meet the flow attributes will not be encapsulated. In some cases, it may be required to create more than 1 flow.


1. Select Tap Management.
2. Select Flow.
3. Select + Add Flow.

The Add Flow panel will appear.

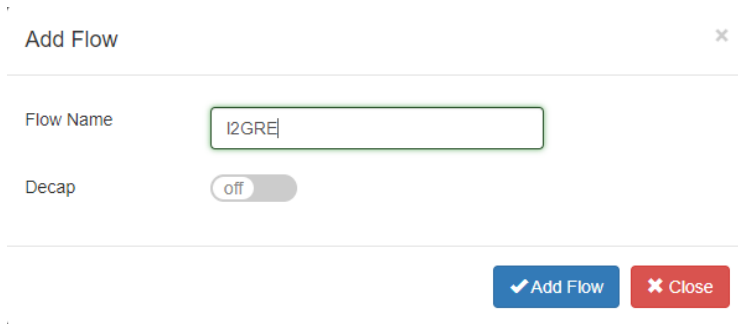

4. Enter the Flow Name.
5. Select Add Flow.


The flow will be displayed.

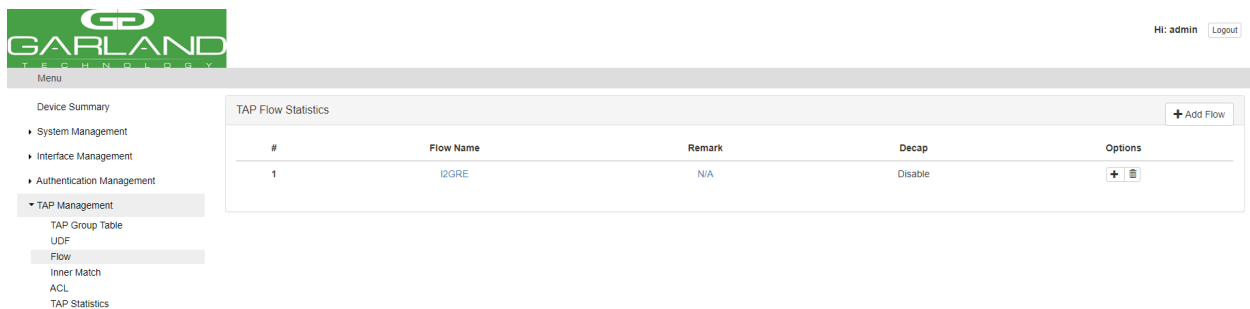

#	Flow Name	Remark	Decap	Options
1	I2GRE	N/A	Disable	+ [trash icon]

6. Select the + in the Options column for the desired flow to define the flow attributes.


The Add Flow Entry panel will be displayed.

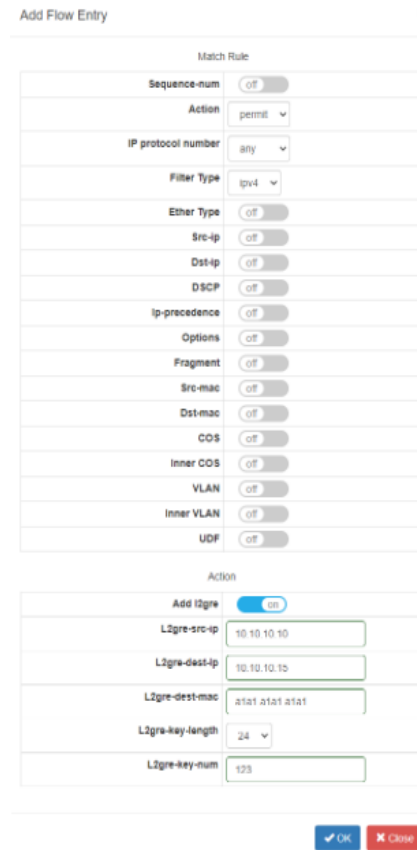

7. Under Match Rule select the desired options and enter the desired values to define which packets are encapsulated with a I2GRE header. If desired the default options may be used to encapsulate all packets.
8. Under Action, select Add I2gre.
9. Enter the desired L2gre-src-ip. This defines the Source IP in the IPv4 segment of the I2GRE header.
10. Enter the desired L2gre-dest-ip. This defines the Destination IP in the IPv4 segment of the I2GRE header.
11. Enter the desired L2gre-dst-mac. This defines the Destination MAC in the Ethernet II segment of the I2GRE header.
12. Select the L2gre-key-length, 16, 20, 24, 32. The default is 24.
13. Enter the L2gre-key-num, 1-16777215.
14. Select OK.

2. Create a Tap Group

The Tap Group defines the ingress port, ingress flow and egress port.



1. Select Tap Management.
2. Select TAP Group Table.
3. Select + Add TAP Group.

The TAP Group Name panel will appear.




TAP Group Name

TAP Group Name

TAP Group ID


4. Enter the TAP Group Name.
5. Select OK.

The Tap Group will be displayed.

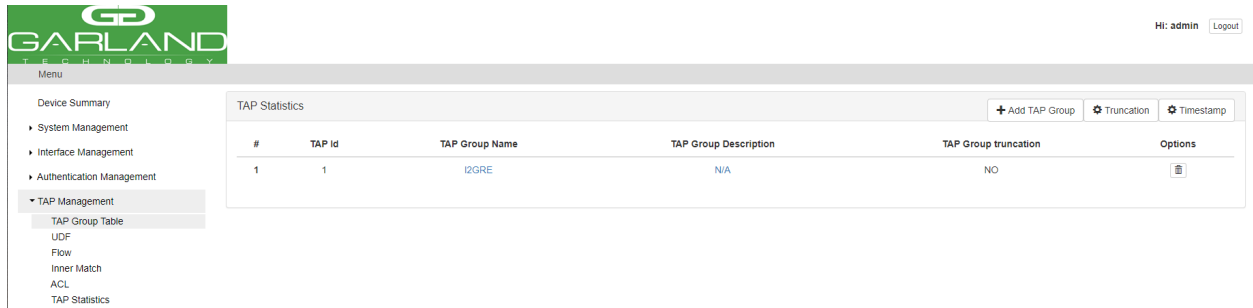


- Place the cursor on the tap group name under the TAP Group Name column and press the left mouse button.

The TAP group panel will appear.

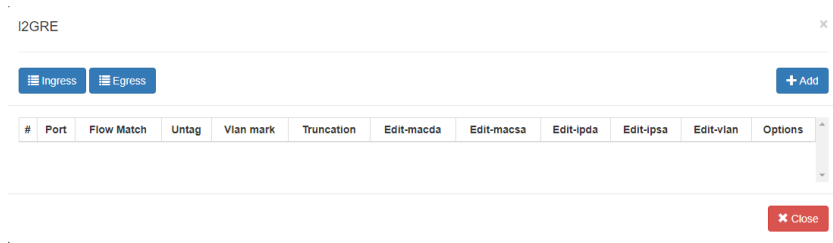


- Select the + Add to define the ingress port and ingress flow.

The add panel will appear.

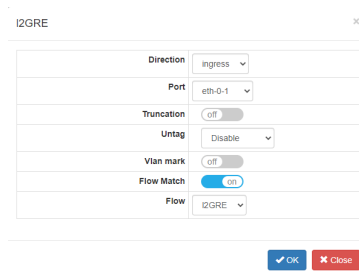


- Select the Direction, ingress.
- Select the desired ingress port.
- Enable Flow Match.
- Select the I2GRE flow.
- Select OK.

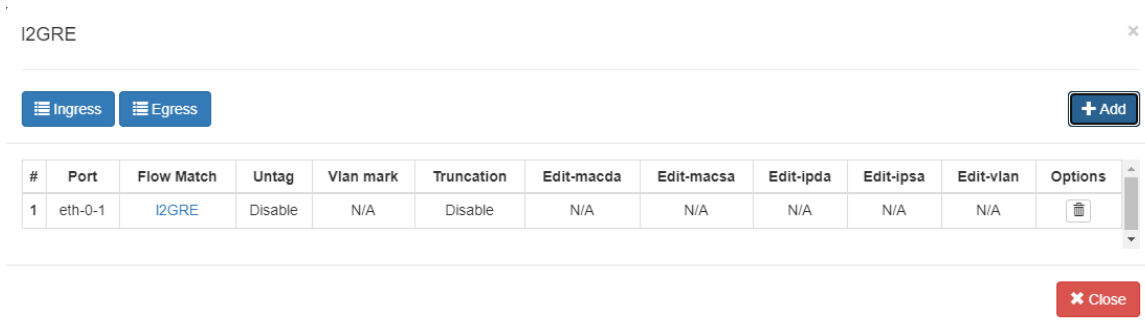

13. Select the + Add to define the egress port.


The add panel will appear.

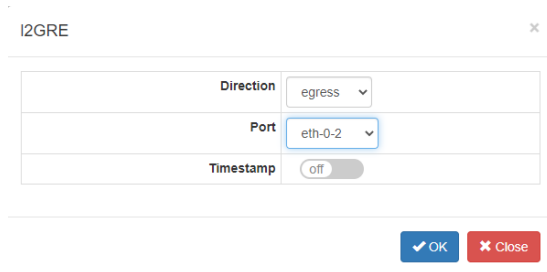

14. Select the Direction, egress.

15. Select the desired egress port.

16. Select OK.

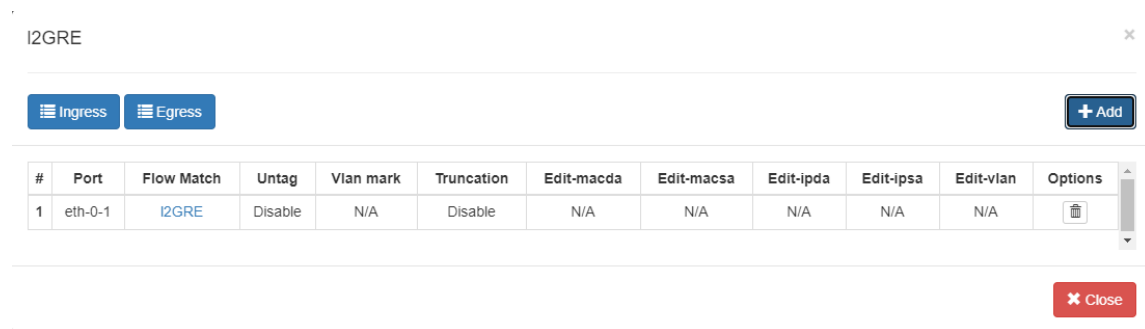


17. The ingress port, ingress flow, and egress port may be displayed by selecting Ingress or Egress. Additional ingress ports, ingress flows, or egress ports may be added to the Tap Group using the same steps.

18. Select Close to return the TAP Group Table display.

I2GRE Decapsulate

Overview:

When an I2GRE packet is decapsulated the I2GRE header segments are removed from the packet.

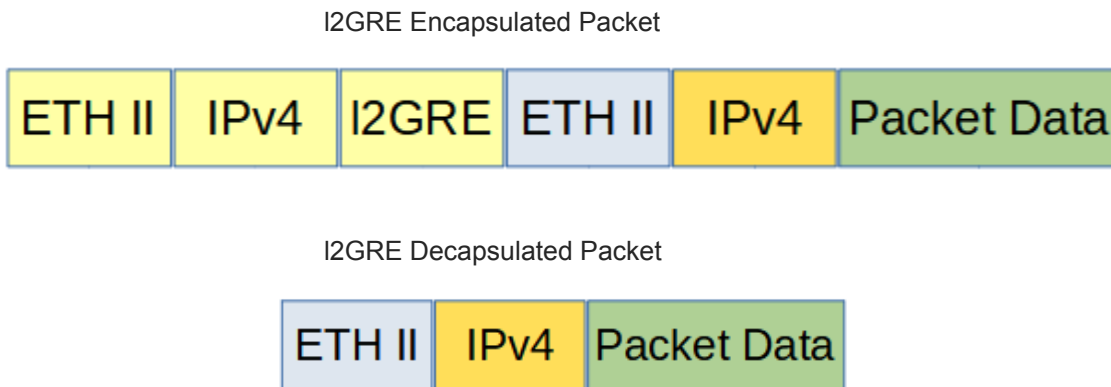

Decapsulating the I2GRE header from a packet involves two configuration processes.


1. Create a Flow
2. Create a Tap Group

1. Create a Flow

The flow defines which I2GRE packets will be decapsulated. Packets that do not meet the flow attributes will not be decapsulated. In some cases, it may be required to create more than 1 flow.


1. Select Tap Management.
2. Select Flow.
3. Select + Add Flow.

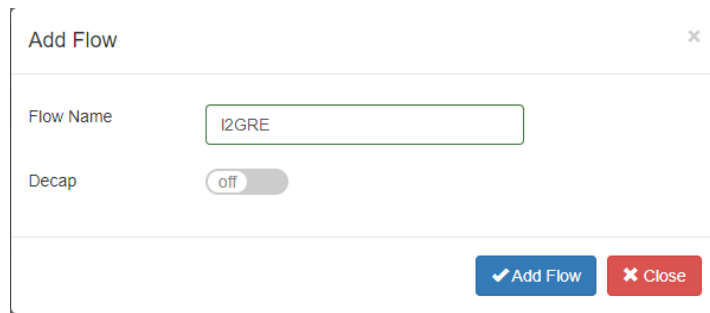

The Add Flow panel will appear.



4. Enter the Flow Name.
5. Select Add Flow.

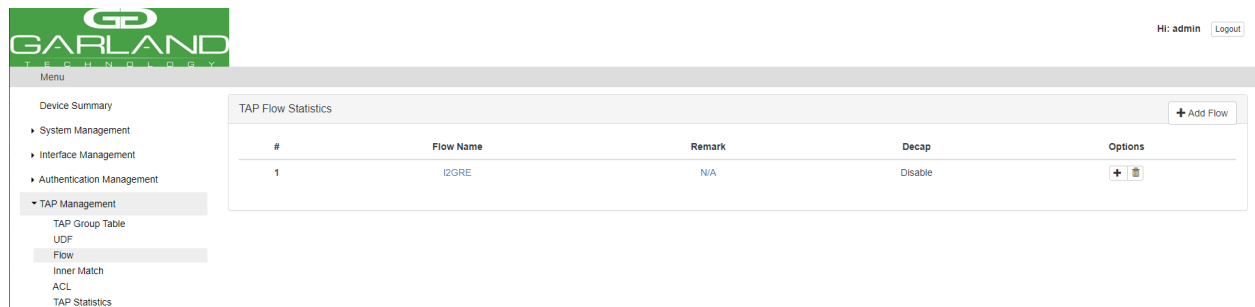
The flow will be displayed.



#	Flow Name	Remark	Decap	Options
1	I2GRE	N/A	Disable	 

6. Select the + in the Options column for the desired flow to define the flow attributes.

The Add Flow Entry panel will be displayed.

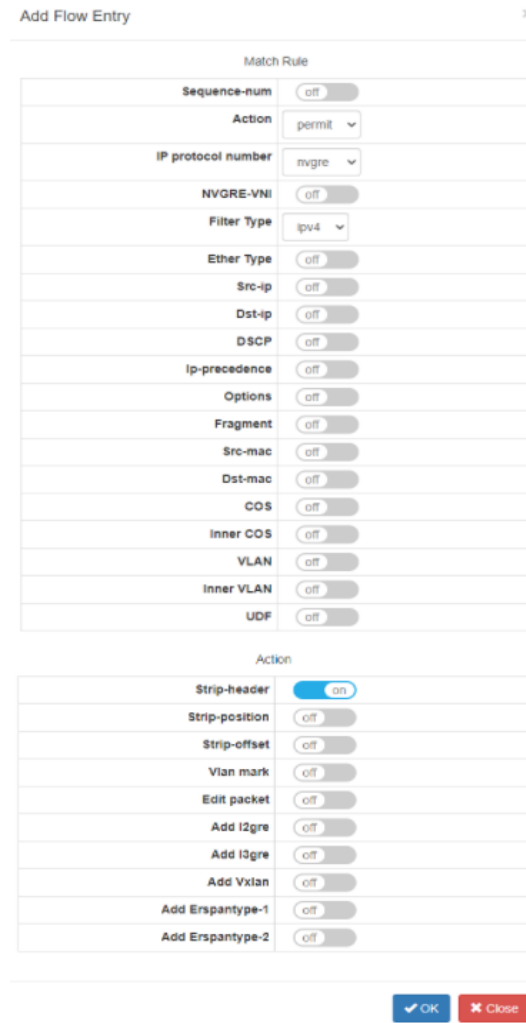

Add Flow Entry

Match Rule

Sequence-num	off
Action	permit
IP protocol number	nvgre
NVGRE-VNI	off
Filter Type	ipv4
Ether Type	off
Src-ip	off
Dst-ip	off
DSCP	off
Ip-precedence	off
Options	off
Fragment	off
Src-mac	off
Dst-mac	off
COS	off
Inner COS	off
VLAN	off
Inner VLAN	off
UDF	off

Action

Strip-header	on
Strip-position	off
Strip-offset	off
Vlan mark	off
Edit packet	off
Add I2gre	off
Add I3gre	off
Add Vxlan	off
Add Ersptype-1	off
Add Ersptype-2	off

OK Close

7. Under Match Rule select nvgre for the IP Protocol Number.


8. Select the other desired options and enter the desired values to define which I2GRE packets are decapsulated. The defaults may be used to decapsulate all I2GRE packets.

9. Under Actions enable Strip-header.

10. Select OK.

2. Create a Tap Group

The Tap Group defines the ingress port, ingress flow, and egress port.



1. Select Tap Management.
2. Select TAP Group Table.
3. Select + Add TAP Group.

The TAP Group Name panel will appear.

TAP Group Name ×


TAP Group Name

TAP Group ID

4. Enter the TAP Group Name.

5. Select OK.

The Tap Group will be displayed.

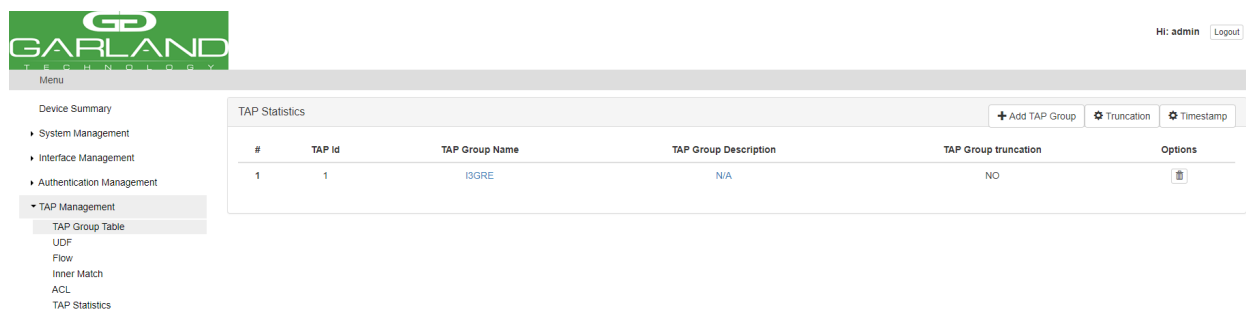

Hi: admin [Logout](#)


Menu

- Device Summary
- System Management
- Interface Management
- Authentication Management
- TAP Management
 - TAP Group Table
 - UDF
 - Flow
 - Inner Match
 - ACL
 - TAP Statistics

#	TAP Id	TAP Group Name	TAP Group Description	TAP Group truncation	Options
1	1	I2GRE	N/A	NO	<input type="button" value="⌵"/>


- Place the cursor on the tap group name under the TAP Group Name column and press the left mouse button.

The TAP group panel will appear.

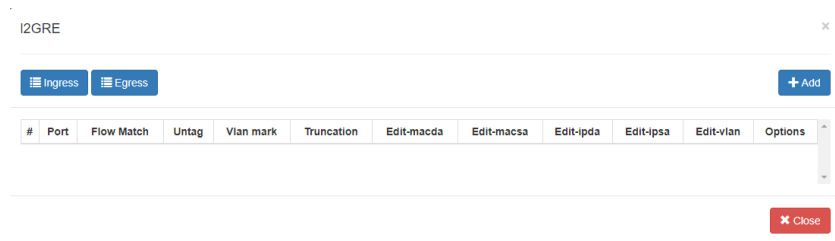

- Select the + Add to define the ingress port and ingress flow.

The add panel will appear.

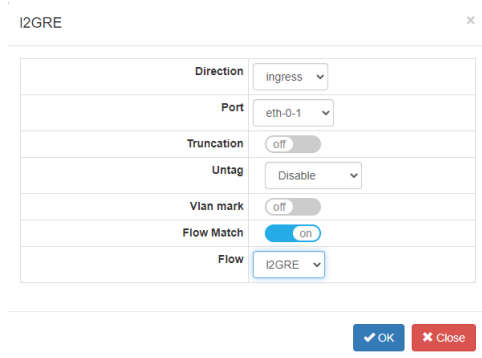

- Select the Direction, ingress.
- Select the desired ingress port.
- Enable Flow Match.
- Select the I2GRE flow.

12. Select OK.

The screenshot shows the I2GRE configuration window. At the top, there are tabs for 'Ingress' and 'Egress', and a '+ Add' button. Below is a table with the following data:

#	Port	Flow Match	Untag	Vlan mark	Truncation	Edit-macda	Edit-macsa	Edit-ipda	Edit-ipsa	Edit-vlan	Options
1	eth-0-1	I2GRE	Disable	N/A	Disable	N/A	N/A	N/A	N/A	N/A	

At the bottom right, there is a red 'Close' button.

13. Select the + Add to define the egress port.

The add panel will appear.

The screenshot shows the 'Add' panel for I2GRE. It has the following fields:

- Direction:** A dropdown menu set to 'egress'.
- Port:** A dropdown menu set to 'eth-0-2'.
- Timestamp:** A toggle switch set to 'off'.

At the bottom, there are 'OK' and 'Close' buttons.

14. Select the Direction, egress.

15. Select the desired egress port.

16. Select OK.

The screenshot shows the I2GRE configuration window after adding a new entry. The table now has two entries:

#	Port	Flow Match	Untag	Vlan mark	Truncation	Edit-macda	Edit-macsa	Edit-ipda	Edit-ipsa	Edit-vlan	Options
1	eth-0-1	I2GRE	Disable	N/A	Disable	N/A	N/A	N/A	N/A	N/A	
	eth-0-2										

The '+ Add' button is still visible at the top right, and the 'Close' button is at the bottom right.

17. The ingress port, ingress flow and egress port may be displayed by selecting Ingress or Egress. Additional ingress ports, ingress flows or egress ports may be added to the Tap Group using the same steps.

18. Select Close to return the the TAP Group Table display.