

PacketMAX™

Advanced Features

Web GUI User Guide By Garland Technology

AF1G40AC



Garland Technology: Advanced Features System
Firmware Rev Level: 3.0.9

Office: 716-242-8500
garlandtechnology.com/support
garlandtechnology.com

Copyright © 2021 Garland Technology, LLC. All rights reserved.

No part of this document may be reproduced in any form or by any means without prior written permission of Garland Technology, LLC.

The Garland Technology trademarks, service marks ("Marks") and other Garland Technology trademarks are the property of Garland Technology, LLC. PacketMAX Series products of marks are trademarks or registered trademarks of Garland Technology, LLC. You are not permitted to use these Marks without the prior written consent of Garland Technology.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Garland Technology and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

Table of Contents

1 Preface	9
1.1 Declaration	9
1.2 Suggestion feedback	9
1.3 Audience	9
2 WEB login	10
2.1 Overview	10
2.2 Manage network port IP address and gateway configuration	10
2.3 User account and password configuration	10
2.4 Web page login	10
3 Equipment Overview	12
3.1 Overview	12
3.2 Device Information	12
3.3 Equipment monitoring	13
4 System Management	16
4.1 Overview	16
4.2 File management	16
4.2.2 Boot file information	16
4.2.3 Start the configuration file information	18
4.2.4 Log file information	19
4.3 Update management	20
4.4 System configuration	20
4.5 Log management	21
4.5.1 Global configuration	21

4.5.2 Module lookup	23
4.5.3 Keyword lookup	24
4.6 Snmp management	25
4.6.1 Server configuration	25
4.6.2 Community configuration	26
4.6.3 SNMP-v3 trap configuration	27
4.7 Time management	27
5 Port management	28
5.1 Overview	28
5.2 Port state	28
5.2.1 Basic information	28
5.2.2 Port property configuration	29
5.3 Port statistics	35
5.3.1 Basic information	35
5.3.2 Update and clear statistics	37
5.3.3 Statistical details	37
5.4 Link aggregation	40
5.4.1 Basic information	41
5.4.2 Global configuration	41
5.4.3 Link aggregation configuration	44
5.5 Optical module status	45
5.5.1 Basic information	46
6 Certification management	47
6.1 Overview	47
6.2 AAA authentication	47
6.2.1 Basic information	47
6.2.2 Global configuration	48
6.2.3 Authentication configuration	48

6.3 Tacacs authentication	49
6.3.1 Basic information	49
6.3.2 Add the server	49
6.3.3 Delete the server	50
6.4 Radius authentication	50
6.4.1 Basic information	51
6.4.2 Add the server	52
6.4.3 Delete the server	52
7 Tap management	53
7.1 Overview	53
7.2 TAP	53
7.2.1 Tap statistics	53
7.2.2 Global configuration	54
7.2.3 Tap statistics configuration	55
7.2.4 Attribute information	56
7.3 Flow	64
7.3.1 Flow statistics	64
7.3.2 Global configuration	65
7.3.3 Flow statistics configuration	65
7.3.4 Attribute configuration	67
7.4 Inner layer matching	78
7.4.1 Inner flow statistics	78
7.4.2 Global configuration	79
7.4.3 Inner flow statistics configuration	79
7.4.4 Attribute configuration	81
7.5 Access control list	83
7.5.1 Access control list statistics	83
7.5.2 Global configuration	84
7.5.3 Access control list configuration	85

7.5.4 Attribute configuration	86
7.6 TAP Statistics	89
7.6.2 Flow statistics of interface	90
8 Tool	91
8.1 Overview	91
8.2 Ping	91
8.2.1 Tool use	91
8.2.2 Console information	91
8.3 Traceroute	92
8.3.1 Tool use	92
8.3.2 Console information	92
8.4 Reboot / Save	93

List of Tables

Table 2-1 main page parameters	13
Table 3-1 Device information panel	15
Table 3-2 Monitor power parameters	15
Table 3-3 Monitor warm pass parameters	16
Table 3-4 Monitor CPU utilization and memory utilization parameters	16
Table 3-5 Monitor fan parameters	16
Table 3-6 Monitor the refresh time configuration	17
Table 4-1 flash file option configuration	18
Table 4-2 boot file parameters	19
Table 4-3 boot file option configuration	19
Table 4-4 start the configuration file parameters	20
Table 4-5 start the configuration file option configuration	20
Table 4-6 log file parameters	21
Table 4-7 log file parameters	21
Table 4-8 update management configuration	22
Table 4-9 update management parameters	22
Table 4-10 global configuration	24
Table 4-11 log statistics parameters	24
Table 4-12 module lookup configuration	25
Table 4-13 log information parameters	26
Table 4-14 keyword lookup configuration	26
Table 4-15 log information parameters	26
Table 4-16 Server configuration parameters	27
Table 4-17 community parameters configuration	28
Table 4-18 community parameters	28
Table 4-19 time management configuration	29
Table 5-1 Port state parameters	30

Table 5-2 Duplex configuration parameters	32
Table 5-3 Svlan-tpid configuration parameters	32
Table 5-4 Rate configuration parameters	33
Table 5-5 Filtering configuration parameters	34
Table 5-6 Describe the configuration parameters	34
Table 5-7 Split port configuration parameters	35
Table 5-8 Port split configuration parameters	36
Table 5-9 Clear the split configuration	36
Table 5-10 Clear the split configuration	37
Table 5-11 Enable configuration parameters	37
Table 5-12 Port statistics parameters	38
Table 5-13 Update and clear statistics configuration	39
Table 5-14 Statistical details parameters	40
Table 5-15 link aggregation parameters	43
Table 5-16 Global configuration	44
Table 5-17 load balance mode configuration	47
Table 5-18 optical module status parameters	48
Table 6-1 AAA authentication parameters	49
Table 6-2 authentication configuration parameters	50
Table 6-3 Tacacs authentication parameters	51
Table 6-4 add server configuration	52
Table 6-5 delete the server	52
Table 6-6 global configuration parameters	53
Table 6-7 Radius authentication parameters	53
Table 6-8 add server configuration	54
Table 6-9 delete the server	54
Table 7-1 Tap statistics parameters	55
Table 7-2 add Tap configuration	56
Table 7-3 message truncated configuration	57
Table 7-4 timestamp configuration	57

Table 7-5 Tap description configuration	58
Table 7-6 Tap option configuration	58
Table 7-7 incoming direction parameters	59
Table 7-8 out of direction parameters	60
Table 7-9 incoming direction configuration	61
Table 7-10 edit the message configuration	64
Table 7-11 out of direction configuration	65
Table 7-12 flow statistics parameters	66
Table 7-13 add a class of flow configuration	67
Table 7-14 flow information parameters	68
Table 7-15 describe the configuration	68
Table 7-16 options configuration	68
Table 7-17 attribute configuration	71
Table 7-18 enable editing messages configuration	79
Table 7-19 inner flow statistics parameters	80
Table 7-20 add a class of inner flow configuration	81
Table 7-21 inner flow information parameters	82
Table 7-22 describe the configuration	82
Table 7-23 option configuration	83
Table 7-24 attribute configuration	84
Table 7-25 access control list statistics parameters	86
Table 7-26 add access control list configuration	86
Table 7-27 access control list information parameters	87
Table 7-28 describe the configuration	88
Table 7-29 option configuration	88
Table 7-30 attribute configuration	89
Table 8-1 Ping tool configuration	93
Table 8-2 traceroute tool configuration	94
Table 8-3 reboot/save configuration	95

List of Figures

Figure 2-1 login page	16
Figure 2-2 main page	16
Figure 3-1 Interface Panel	17
Figure 3-2 Device information panel	17
Figure 3-3 device monitor panel	18
Figure 4-1 file management page	21
Figure 4-2 boot file page	22
Figure 4-3 start the configuration file page	23
Figure 4-4 log file parameter	24
Figure 4-5 update management configuration	25
Figure 4-6 system configuration	26
Figure 4-7 log global configuration	26
Figure 4-8 module lookup	28
Figure 4-9 keyword lookup	29
Figure 4-10 Server configuration	30
Figure 4-11 community configuration	31
Figure 4-12 snmp trap configuration	32
Figure 4-13 time management	32
Figure 5-1 Port state	33
Figure 5-2 Port duplex configuration	34
Figure 5-3 Port Svlan-tpid configuration	35
Figure 5-4 Port rate configuration	36
Figure 5-5 Port filtering configuration	37
Figure 5-6 Port description configuration	37
Figure 5-7 Port split configuration	38
Figure 5-8 Port split configuration	38
Figure 5-9 Clear the split port	39

Figure 5-10 Clear the split port	40
Figure 5-11 Port statistics	41
Figure 5-12 Update and clear statistics	42
Figure 5-13 statistical details	43
Figure 5-14 Link aggregation	46
Figure 5-15 Global configuration	47
Figure 5-16 add the aggregation group	50
Figure 5-17 delete the aggregation group	50
Figure 5-18 load balance mode	50
Figure 5-19 optical module status	51
Figure 6-1 AAA authentication	52
Figure 6-2 AAA authentication global configuration	53
Figure 6-3 AAA authentication configuration	53
Figure 6-4 Tacacs authentication	54
Figure 6-5 add the server	55
Figure 6-6 Radius authentication	56
Figure 6-7 add the server	57
Figure 7-1 Tap statistics	58
Figure 7-2 add Tap	59
Figure 7-3 message truncated	59
Figure 7-4 timestamp	60
Figure 7-5 Tap description	61
Figure 7-6 incoming direction information	62
Figure 7-7 out of direction information	63
Figure 7-8 incoming direction configuration	64
Figure 7-9 enable packet truncation	65
Figure 7-10 enable VLAN stripping	65
Figure 7-11 enable inner layer matching	66
Figure 7-12 enable editing messages	67
Figure 7-13 out of direction configurations	68

Figure 7-14 flow statistics	69
Figure 7-15 add a class of flow	70
Figure 7-16 flow information	70
Figure 7-17 describe the information	71
Figure 7-18 attribute configuration	73
Figure 7-19 source MAC	76
Figure 7-20 destination MAC	76
Figure 7-21 VLAN	76
Figure 7-22 Strip-header	77
Figure 7-23 enable packet truncation	78
Figure 7-24 enable VLAN stripping	79
Figure 7-25 enable editing messages	80
Figure 7-26 Add L2gre	80
Figure 7-27 Add L3gre	80
Figure 7-28 Add Vxlan	81
Figure 7-29 Add Erspan-type-1	81
Figure 7-30 Add Erspan-type-2	82
Figure 7-31 inner flow statistics	83
Figure 7-32 add a class of inner flow	84
Figure 7-33 inner flow information	85
Figure 7-34 describe the configuration	85
Figure 7-35 acl attribute configuration	86
Figure 7-36 source MAC	88
Figure 7-37 destination MAC	88
Figure 7-38 VLAN	88
Figure 7-39 access control list statistics	89
Figure 7-40 add access control list	89
Figure 7-41 access control list information	90
Figure 7-42 describe the configuration	91
Figure 7-43 acl attribute configuration	92

Figure 7-44 source MAC	94
Figure 7-45 destination MAC	94
Figure 7-46 VLAN	94
Figure 7-47 TAP statistics	94
Figure 7-48 flow statistics	95
Figure 8-1 Ping tool	96
Figure 8-2 Ping console information	97
Figure 8-3 traceroute tool	97
Figure 8-4 traceroute console information	98
Figure 8-5 reboot/save parameters	98

Revision History

Date	Version	Description
2020-03-31	R1.0	Initial release

1 Preface

1.1 Declaration

This document updates at irregular intervals because of product upgrade or other reason.

This document is for your reference only.

1.2 Suggestion feedback

If you have any questions when using our product and reading this document, please contact us:

<https://www.garlandtechnology.com/support>

1.3 Audience

This document is for the following audiences:

- System maintenance engineers
- Debugging and testing engineers
- Network monitoring engineers
- Field maintenance engineers

WEB login

1.1 Overview

This chapter describes how to configure the switch to start the Web management function.

1.1 Manage network port IP address and gateway configuration

Before you can manage the switch through the Web, you need to configure the IP address and gateway of the management network port through the command line.

E.g :

```
Switch(config)# management ip address 10.10.39.101/23
Switch(config)# management route add gateway 10.10.39.254
```



NOTE

The default IP address is 10.10.10.200

1.1 User account and password configuration

The user account and password for WEB management need to be configured through the command line. E.g:

```
Switch (config)#username admin privilege 4 password gtadmin1
```



NOTE

The default user and password is admin, gtadmin1

1.1 Web page login

Open the browser (not recommended to use IE), enter the switch management address, login page shown in Figure.

Login

Figure 1-1 login page

In the login page, enter the user name and password you have created, click “Login”, then enter the main page, as shown in Figure.

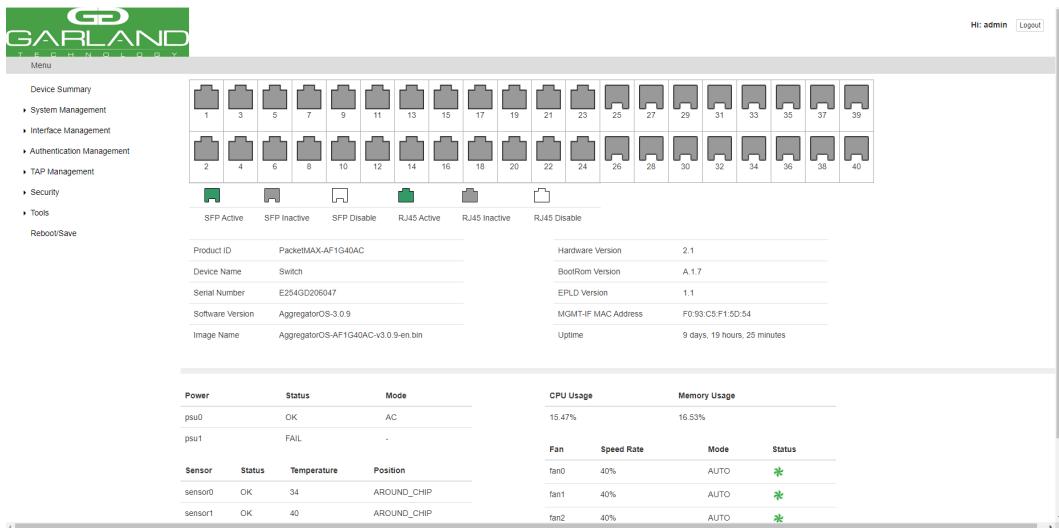


Figure 1-1 main page

Table 1-1 main page parameters

Parameter item	Description
1	Vendor icon
2	Login Username
3	Navigation sidebar
4	Operation display area

2 Equipment Overview

1.1 Overview

This chapter describes the display items of the main page and their parameters, including the device interface panel, device information and equipment working status monitoring area.

Click “Device Overview” in the navigation bar to switch from other pages to the main page. The interface area of the main page of the device interface shows the status of each interface, as shown in Figure.

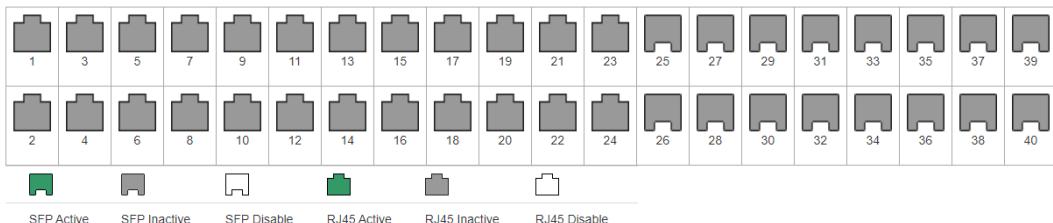


Figure 1-1 Interface Panel

The ports on the page correspond to the actual physical ports on the switch, while distinguishing between optical and electrical ports. The status of the port is distinguished by the color of the picture, including “active”, “inactive”, “off”.

1.1 Device Information

The device information section of the main page, as shown in Figure.

Product ID	PacketMAX-AF1G40AC	Hardware Version	2.1
Device Name	Switch	BootRom Version	A.1.7
Serial Number	E254GD206047	EPLD Version	1.1
Software Version	AggregatorOS-3.0.9	MGMT-IF MAC Address	F0:93:C5:F1:5D:54
Image Name	AggregatorOS-AF1G40AC-v3.0.9-en.bin	Uptime	9 days, 19 hours, 28 minutes

Figure 1-1 Device information panel

Table 1-1 Device information panel

Parameter item	Description
Product ID	Switch hardware model
Device Name	Switch name
Software version	Switch software version
Image Name	Start the mirror name
Hardware Version	Switch hardware version
Serial Number	Switch serial number
MAC Address	The MAC address of the switch system
Uptime	The switch has been running for the time

1.1 Equipment monitoring

The main page of the device monitoring section, as shown in Figure..

Power	Status	Mode	CPU Usage		Memory Usage		
psu0	OK	AC	8.64%		16.52%		
psu1	FAIL	-					
Sensor	Status	Temperature	Position	Fan	Speed Rate	Mode	Status
sensor0	OK	34	AROUND_CHIP	fan0	40%	AUTO	*
sensor1	OK	40	AROUND_CHIP	fan1	40%	AUTO	*
sensor2	OK	49	SWITCH_CHIP0	fan2	40%	AUTO	*
				fan3	40%	AUTO	*

Figure 1-1 device monitor panel

Table 1-1 Monitor power parameters

Parameter item	Description
Power	The serial number of the switch power supply
Status	Corresponding to the status of the

	numbered power supply
Mode	Corresponds to the mode of the power supply

Table 1-1 Monitor warm pass parameters

Parameter item	Description
Sensor	The serial number of the switch warm pass
Status	Corresponding to the number of warm state
Temperature	Corresponding to the temperature of the temperature
Position	Corresponding to the number of warmth of the location

Table 1-1 Monitor CPU utilization and memory utilization parameters

Parameter item	Description
CPU Usage	System CPU utilization
Memory Usage	System memory utilization

Table 1-1 Monitor fan parameters

Parameter item	Description
Fan	Number of the switch fan
Speed Rate	Corresponding to the speed ratio of the fan
Mode	Corresponds to the pattern of the fan
Status	Corresponds to the status of the

	numbered fan
--	--------------

Table 1-1 Monitor the refresh time configuration

Configuration item	Description
Refresh interval(Second)	Set the page to automatically refresh the interval

2 System Management

1.1 Overview

This chapter describes the various parts of the system administration, including file management, upgrade management, system configuration, log management, SNMP management, and time management.

1.1 File management

Click “System Management”> “File Management” to enter the file management page, the page is divided into file management options, boot and flash use size, file management information, as shown in Figure. Page click on the “Boot files”, “Startup config files”, “Log files” can view different types of file information

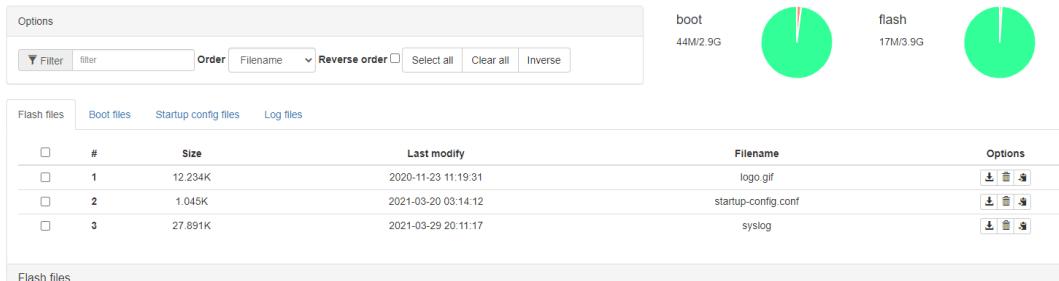


Figure 1-1 file management page

Table 1-1 flash file option configuration

Configuration item	Description
	Download the corresponding boot file

	Delete the corresponding boot file
	Back up the corresponding boot file

1.1.1 Boot file information

Click on the “Boot files” can view the boot file information page, boot file page shown in Figure.

Flash files	Boot files	Startup config files	Log files

Figure 1-1 boot file page

Table 1-1 boot file parameters

Parameter item	Description
#	boot file number
Size	Corresponds to the size of the boot file
Last modify	Corresponding number The last time the boot file was modified
Filename	Corresponding to the name of the boot file
Current image	Corresponding number Whether the boot file is the current mirror
Next startup image	Corresponding number The boot file is the next boot image
Options	Corresponding to the number of boot file support options

Table 1-1 boot file option configuration

Configuration item	Description
	Download the corresponding boot file
	Delete the corresponding boot file
	Set the corresponding boot file for the next boot image, restart after the entry into force
	Back up the corresponding boot file

1.1.1 Start the configuration file information

Click “Startup Config files” to view the startup configuration file information page, start the configuration file page as shown in Figure.

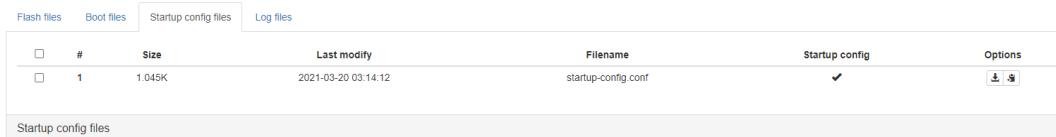


Figure 1-1 start the configuration file page

Table 1-1 start the configuration file parameters

Parameter item	Description
#	Start the configuration file number
Size	Corresponding number starts the size of the configuration file
Last modify	Corresponding number The last time the configuration file was modified
Filename	Corresponding to the name of the startup configuration file
Startup config	Corresponding number The startup configuration file is configured for

	startup
Options	Corresponding number The option to start the configuration file support

Table 1-1 start the configuration file option configuration

Configuration item	Description
	Download the startup configuration file for the corresponding number
	Delete the startup configuration file for the corresponding number
	Set the corresponding startup configuration file for the next startup configuration
	Back up the startup configuration file for the corresponding number

1.1.1 Log file information

Click “Log files” to view the log file information page, log file page shown in Figure.

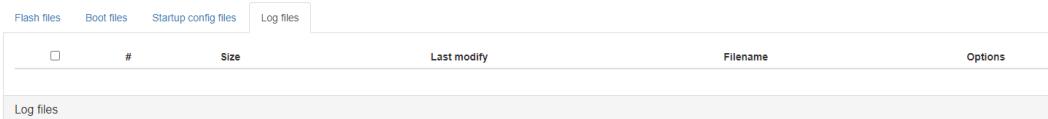


Figure 1-1 log file parameter

Table 1-1 log file parameters

Parameter item	Description
#	Log file number
Size	Corresponds to the size of the log file
Last modify	Corresponds to the date the log file is

	last modified
Filename	Corresponds to the name of the log file
Options	Corresponding to the options supported by the number log file

Table 1-1 log file parameters

Configuration item	Description
	Download the corresponding log file
	Delete the log file for the corresponding number
	Back up the corresponding log file

1.1 Update management

Click “System Management”> “Update Management” to enter the upgrade management page, as shown in Figure.

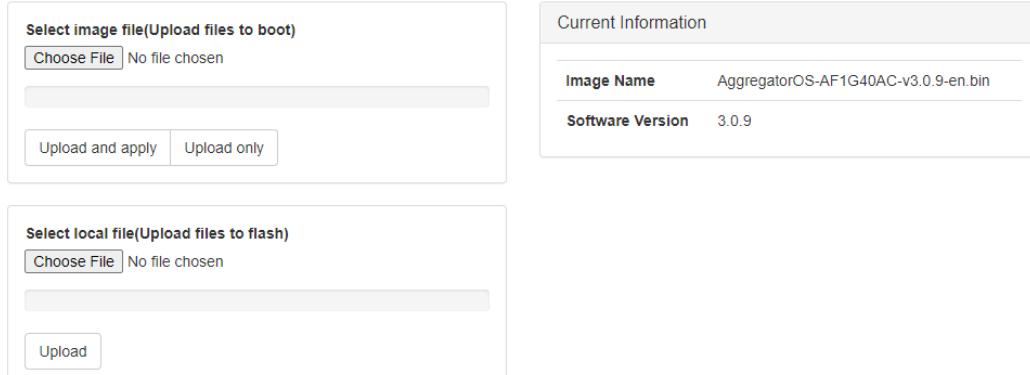


Figure 1-1 update management configuration

Table 1-1 update management configuration

Configuration item	Description
Select image file	Select the image file(Upload files to


	boot)
Upload and apply	Upload and upgrade the image file
Upload only	Only upload image files
Select local file	Select local file(Upload files to flash)
Upload only	Only upload local files

Table 1-1 update management parameters

Parameter item	Description
Image Name	current system image
Software Version	current software version

1.1 System configuration

Click “System Management”> “System Configuration”to enter the system configuration page, as shown in Figure. Click " OK " to save the configurations

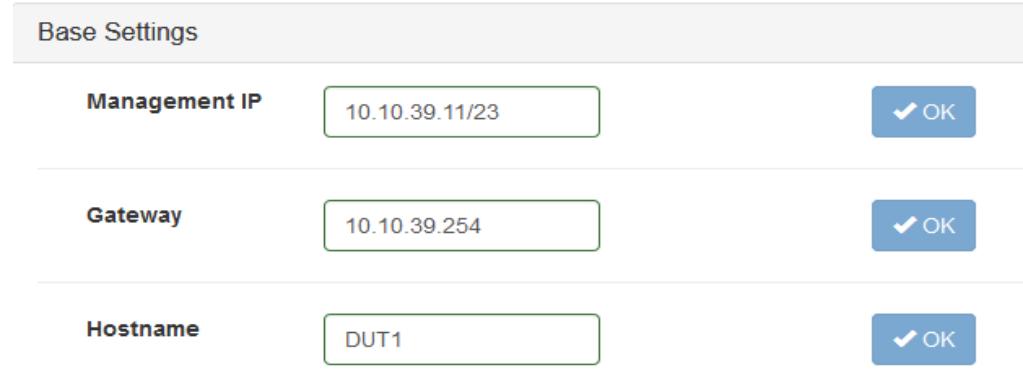

The screenshot shows a configuration interface with a header "Base Settings". Below it are three input fields with "OK" buttons:

- Management IP:** 10.10.39.11/23
- Gateway:** 10.10.39.254
- Hostname:** DUT1


Figure 1-1 system configuration

1.1 Log management

Click “System Management”> “Log Management” to enter the log management page, click the “global configuration”, “module search”, “keyword search” different ways to manage the log.

1.1.1 Global configuration

Click “Global Configuration” to view the global configuration page of the log management. The global configuration is shown in Figure.

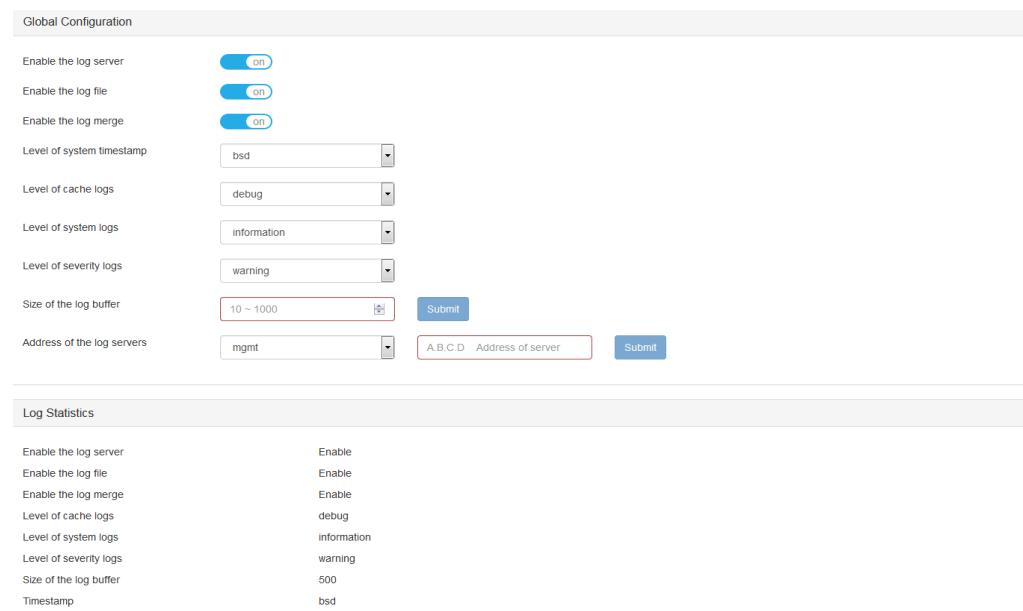

The screenshot shows the "Global Configuration" interface. It includes several configuration fields with dropdown menus and checkboxes:

- Enable the log server: On
- Enable the log file: On
- Enable the log merge: On
- Level of system timestamp: bsd
- Level of cache logs: debug
- Level of system logs: information
- Level of severity logs: warning
- Size of the log buffer: 10 ~ 1000 (with a plus sign icon)
- Address of the log servers: mgmt (with a dropdown arrow) and A.B.C.D Address of server (disabled)

Below this is a "Log Statistics" table:

Enable the log server	Enable
Enable the log file	Enable
Enable the log merge	Enable
Level of cache logs	debug
Level of system logs	information
Level of severity logs	warning
Size of the log buffer	500
Timestamp	bsd

Figure 1-1 log global configuration

Table 1-1 global configuration

Configuration item	Description
Enable the log server	Configure whether to enable Server
Enable the log file	Configure whether to enable logging file
Enable the log merge	Configure whether to enable logging merge

Level of system timestamp	Configure the timestamp format of log information, including: date, bsd, iso, none
Level of system logs	Configure the system log level, including: emergency, alert, critical, error, warning, notice, information, debug
Level of cache logs	Configure the cache log level, including: emergency, alert, critical, error, warning, notice, information, debug
Level of severity logs	Configure the severity log level, including: emergency, alert, critical, error, warning, notice, information, debug
Size of the log buffer	Configure the cache size, valid values: 10-1000
Address of the log servers	Configure the IP address of the Outbound Management port of the Server

Table 1-1 log statistics parameters

Parameter item	Description
Enable the log server	Whether the server is currently enabled
Enable the log file	Whether the file is currently enabled
Enable the log merge	Whether the merge is currently enabled
Level of system logs	Current system log level

Level of cache logs	Current cache log level
Level of severity logs	Current severity log level
Size of the log buffer	Current cache size
Timestamp	The current timestamp format

1.1.1 Module lookup

Click “Module lookup” to view the log management module lookup page, the module looks like Figure.

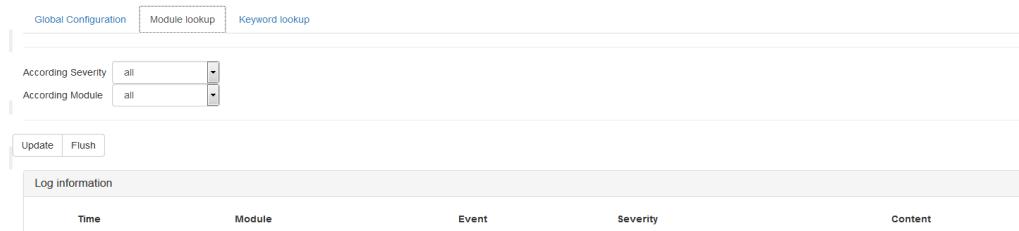


Figure 1-1 module lookup

Table 1-1 module lookup configuration

Configuration item	Description
According Severity	The module is searched by level, including:0-7
According Module	Module search by module, the module includes: All, AAA, FAN, INTERFACE, LAG, NTP, POWER, PSU, SYSTEM, TEMPERATURE, TRANACEIVER, SSHD
Update	Refresh all logs
Flush	Delete all logs

Table 1-1 log information parameters

Parameter item	Description
Time	Corresponding log generated time
Module	Corresponds to the module to which the log belongs
Event	Corresponding log events
Severity	Corresponds to the priority of the log
Content	Corresponds to the contents of the log record

1.1.1 Keyword lookup

Click on “keyword” to view the log management keyword search, keyword search shown in Figure.

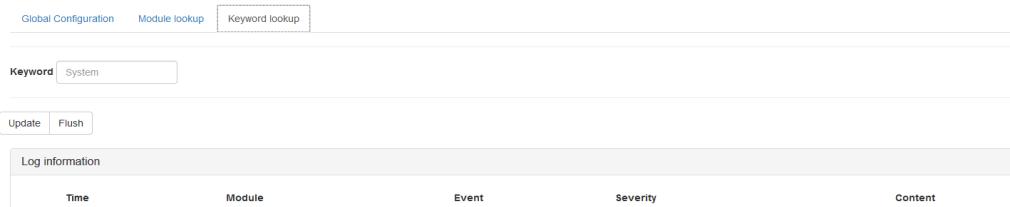


Figure 1-1 keyword lookup

Table 1-1 keyword lookup configuration

Configuration item	Description
Keyword	Log search by keyword
Update	Refresh all logs
Flush	Delete all logs

Table 1-1 log information parameters

Parameter item	Description
Time	Corresponding log generated time
Module	Corresponds to the module to which the log belongs
Event	Corresponding log events
Severity	Corresponds to the priority of the log
Content	Corresponds to the contents of the log record

1.1 Snmp management

Click “System Management”> “Snmp Management” to enter the Snmp management page, click “SNMP Server Configuration”, “SNMP Community Configuration” to carry out the relevant configuration.

1.1.1 Server configuration

Click " SNMP Server Configuration " to view the server configuration page for Snmp management, as shown in Figure.



Figure 1-1 Server configuration


Table 1-1 Server configuration parameters

Configuration item	Description
Enable Snmp Server	Configure whether to enable SNMP

Enable Snmp	Configure whether to enable Trap
Set Snmp Version	Set version, version includes:all、v1、v2c
Set Trap Target Address	Set the IP address and community name of the Trap server

1.1.1 Community configuration

Click “community configuration” to view the SNMP management and community configuration page, as shown in Figure.

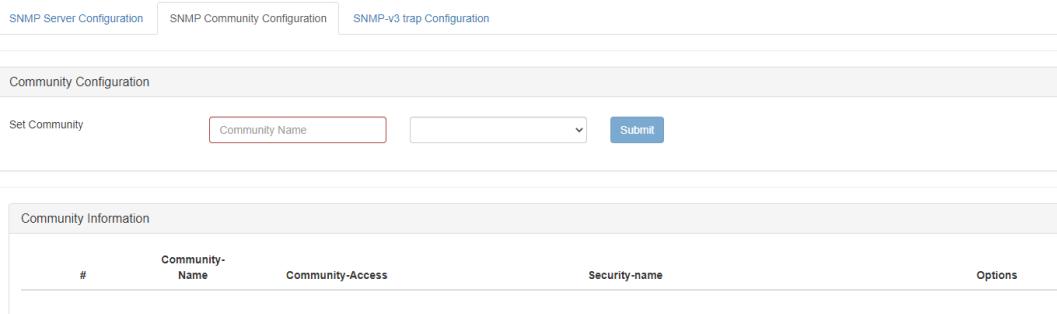

#	Community-Name	Community-Access	Security-name	Options

Figure 1-1 community configuration

Table 1-1 community parameters configuration

Configuration item	Description
Set Community	Set the Community name and permissions, permissions include: read-only and read and write

Table 1-1 community parameters


Parameter	Description
#	Corresponds to the number of Community

Name	Corresponding to the name Community
Community-Access	Corresponding number Community permissions
Security-name	Corresponding number Community security name
Options	Corresponding number Community support options, options include: delete

1.1.1 SNMP-v3 trap configuration

Click “SNMP-v3 trap configuration” to view the SNMP management and SNMP-v3 trap configuration page, as shown in Figure.

Figure 1-1 snmp trap configuration

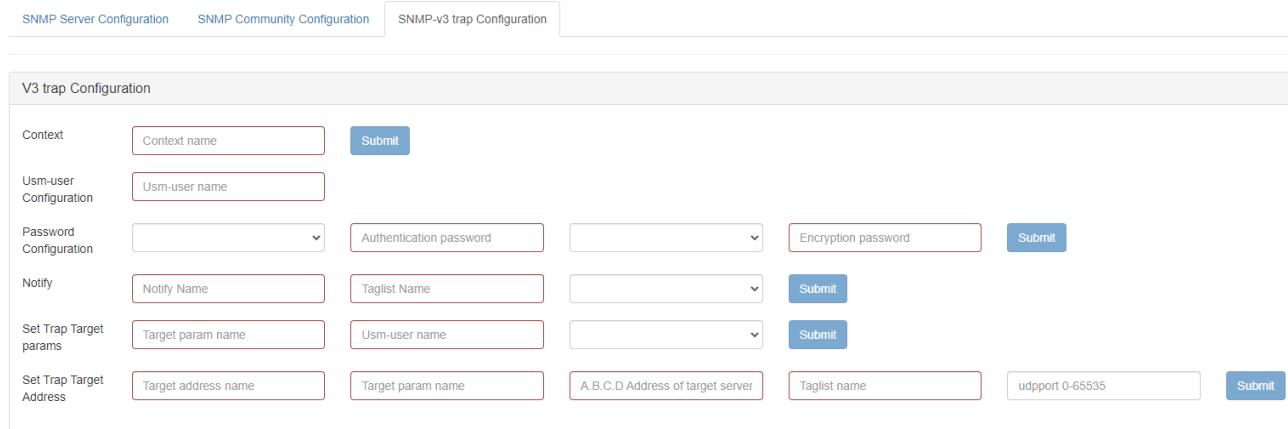

The screenshot shows the "V3 trap Configuration" page with the following fields:

- Context:** Context name (input field) and Submit button.
- Usm-user Configuration:** Usm-user name (input field).
- Password Configuration:** Authentication password (input field), Encryption password (input field), and Submit button.
- Notify:** Notify Name (input field), Taglist Name (input field), and Submit button.
- Set Trap Target params:** Target param name (input field), Usm-user name (input field), and Submit button.
- Set Trap Target Address:** Target address name (input field), Target param name (input field), A.B.C.D Address of target server (input field), Taglist name (input field), udpport 0-65535 (input field), and Submit button.

1.1 Time management

Click “System Management”> “Time Management”to enter the time management page, as shown in Figure.

The screenshot shows the 'Global Configuration' section of the PacketMAX interface. It includes fields for 'System Time' (06:35:19 Fri Mar 20 2020 UTC) with a 'Refresh' button, 'Set Time' fields for year (2020), month (3), day (20), hour (06), minute (35), second (19), and a 'Submit' button. There's also a 'Set Ntp Server' dropdown set to 'mgmt' and a text input field 'A.B.C.D Address of server' with a placeholder 'mgmt'. A 'Timestamp sync' switch is set to 'off'.

Figure 1-1 time management

Table 1-1 time management configuration

Configuration item	Description
System Time	the current system time
Set Time	Set the system time
Set NTP Server	Set the IP address of the NTP server

2 Port management

1.1 Overview

This chapter describes the port configuration on the switch.

1.1 Port state

This section describes how to configure and view the port connection status.

1.1.1 Basic information

Click “Interface Management”>“Interface Status” to enter the port state home page, as shown in Figure . This page shows the working status of each port on the switch. Click on the relevant state to enter the corresponding port state configuration.

Port	Status	Duplex	Svlan-tpid	Speed	Phy-type	Filter	Description	Split	Enable
eth-0-1	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-2	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-3	up	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-4	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-5	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-6	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-7	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-8	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-9	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-10	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-11	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-12	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-13	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-14	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-15	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-16	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-17	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-18	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	
eth-0-19	down	auto	0x8100	AUTO	1000BASE_T	N/A	N/A	No	

Figure 1-1 Port state

Table 1-1 Port state parameters

Parameter item	Description
Port	Displays the port name
Status	Displays the link status of the port (up or down)
Duplex	Displays the duplex mode of the port (auto, full, half)
Svlan-tpid	Displays the svlan-tpid (0x8100, 0x88A8, 0x9100) for the corresponding port
Speed	Displays the operating rate of the port (auto, 10, 100, 1000, 2.5G, 5G, 10G, 25G, 40G, 100G)
Phy-Type	Displays the physical type of the port
Filter	Display port filtering
Description	Displays the description of the port
Split	Displays the split of the port (yes, no)
Enable	Displays the port enable

1.1.1 Port property configuration

Port duplex configuration

Click on the port duplex function, enter the port duplex configuration, as shown in Figure. Click “OK” to complete the configuration.

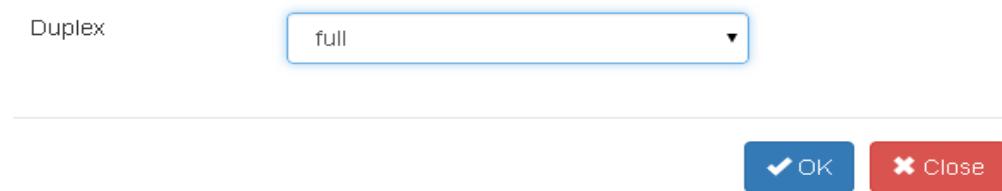


Figure 1-1 Port duplex configuration

Table 1-1 Duplex configuration parameters

Configuration item	Description
full	Configure the port as full duplex mode
half	Configure the port as half duplex mode
auto	Configure the port as auto duplex mode

Port Svlan-tpid configuration

Click on the port Svlan-tpid function, enter the port Svlan-tpid configuration, as shown in Figure. Click “OK” to complete the configuration.

Port Svlan-tpid configuration

Figure 1-1 Port Svlan-tpid configuration

Table 1-1 Svlan-tpid configuration parameters

Configuration item	Description
0x8100	Configure the port at Svlan-tpid of 0x8100
0x88A8	Configure the port at Svlan-tpid of 0x88A8
0x9100	Configure the port at Svlan-tpid of 0x9100

Port rate configuration

Click on the port rate attribute, enter the port rate configuration, as shown in Figure, click “OK” to complete the configuration

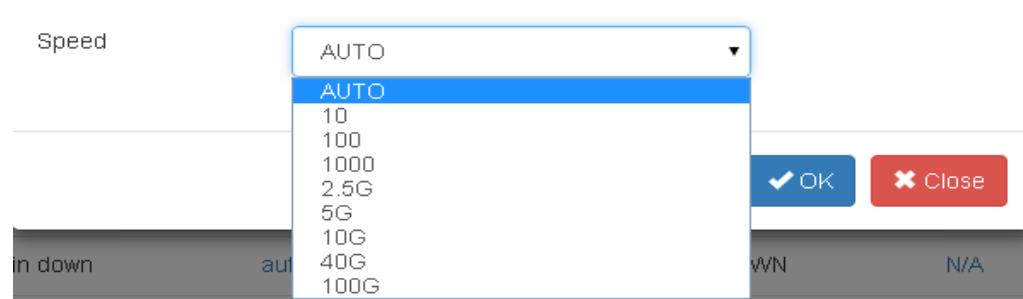


Figure 1-1 Port rate configuration

Table 1-1 Rate configuration parameters

Configuration item	Description
AUTO	Configure the port as auto
10	Configure the port at a rate of 10M
100	Configure the port at a rate of 100M
1000	Configure the port at a rate of 1000M
2.5G	Configure the port at a rate of 2.5G
5G	Configure the port at a rate of 5G
10G	Configure the port at a rate of 10G
25G	Configure the port at a rate of 25G
40G	Configure the port at a rate of 40G
100G	Configure the port at a rate of 100G

Port filtering configuration

Click on the port filter attributes, enter the port filter configuration, as shown in Figure, click “OK” to complete the configuration.

The screenshot shows a configuration dialog box. At the top left is a label 'Enable' next to a blue toggle switch set to 'on'. Below it is a label 'Flow Name' followed by a dropdown menu with a downward arrow. At the bottom right are two buttons: a blue 'OK' button with a checkmark icon and a red 'Close' button with a close X icon.

Figure 1-1 Port filtering configuration

Table 1-1 Filtering configuration parameters

Configuration item	Description
Enable	Configure whether the port is enabled for filtering
Flow Name	Configure the name of the port to filter

Port description configuration

Click the port description attribute, enter the port description configuration, as shown in Figure, click “OK” to complete the configuration.

The screenshot shows a configuration dialog box. At the top left is a label 'Enable' next to a blue toggle switch set to 'on'. Below it is a label 'Description' followed by a text input field containing the text 'Port description'. At the bottom right are two buttons: a blue 'OK' button with a checkmark icon and a red 'Close' button with a close X icon.

Figure 1-1 Port description configuration

Table 1-1 Describe the configuration parameters

Configuration item	Description
Enable	Configure whether the port is enabled
Description	Configure the description of the port

Port split configuration

Port split configuration:

Click the port description attribute, enter the port description configuration, as shown in Figure, click “OK” to complete the configuration.



Figure 1-1 Port split configuration

Table 1-1 Split port configuration parameters

Configuration item	Description
Prompt information	The split configuration will be written to startup-config and will take effect after reboot
Split Port	Configure split points for 10giga, 40giga

Click on the port split attribute “Yes”, enter the port split configuration, as shown in Figure, click “OK” to complete the configuration.



Figure 1-1 Port split configuration

Table 1-1 Port split configuration parameters

Configuration item	Description
Prompt information	The split configuration will be written to startup-config and will take effect after reboot
Prompt information	Indicates whether the current port state is aggregated and whether the port is split

Clear the split port:

Click the split attribute “NO” to split the port, enter the clear port split configuration, as shown in Figure, click “clear” to complete the configuration.

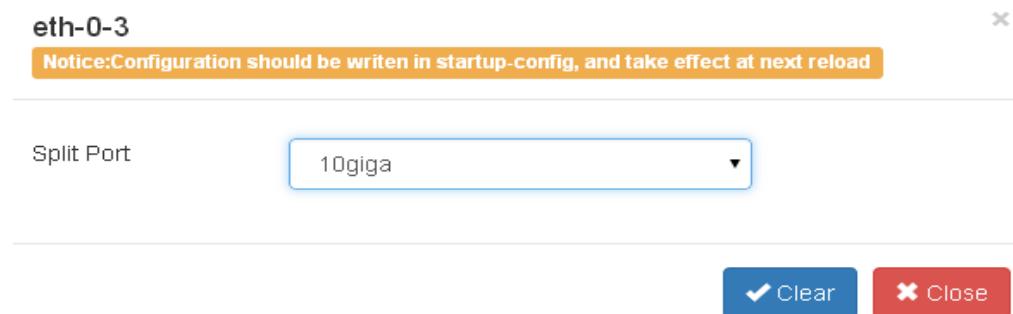


Figure 1-1 Clear the split port

Table 1-1 Clear the split configuration

Configuration item	Description
Prompt information	The split configuration will be written to startup-config and will take effect after reboot
Split Port	Configure split points for 10giga, 40giga

Click the split attribute “YES” to split the port, enter the clear port split configuration, as shown in Figure 4 10, click “OK” to complete the configuration.



Figure 1-1 Clear the split port

Table 1-1 Clear the split configuration

Configuration item	Description
Prompt information	The split configuration will be written to startup-config and will take effect after reboot
Prompt information	Prompts whether the current port state is split and aggregates the port

Port enable configuration

Click the enable attribute of the port to select whether to enable the port.

Table 1-1 Enable configuration parameters

Configuration item	Description
Enable	Configure whether the port is enabled or not

1.1 Port statistics

This section describes how to view the statistics for a port.

1.1.1 Basic information

Click “Interface Management”>“Interface Stats” to enter the port statistics main page, as shown in Figure.

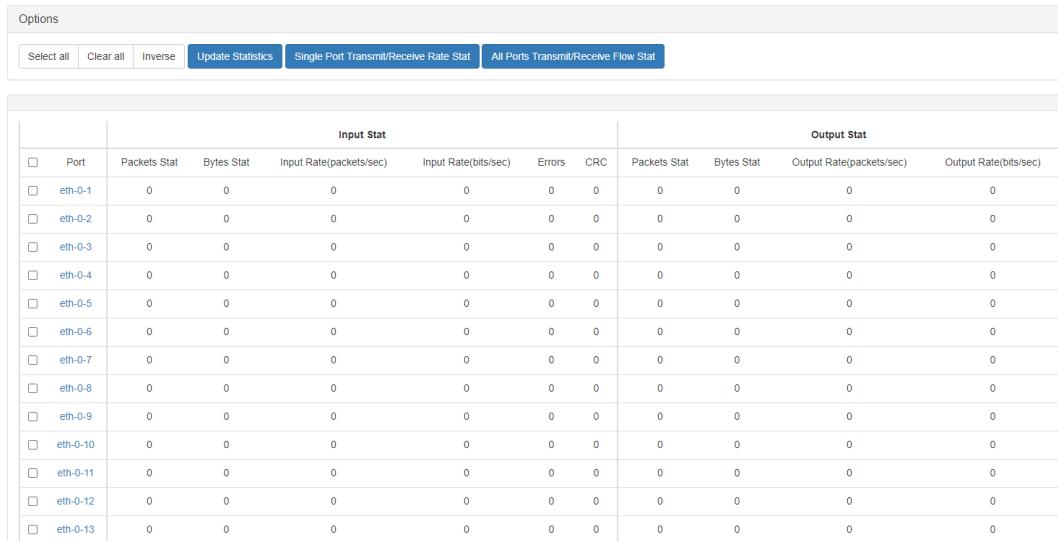


Figure 1-1 Port statistics

Table 1-1 Port statistics parameters

Parameter item	Description
<input type="checkbox"/>	Corresponding port selection box
Port	Corresponding port name

Packet Input	Correspondent packets of incoming packets
Bytes Input	Corresponds to the incoming byte of the port statistics
5 Minute Input Rate(packets/sec)	Corresponding port 5 minutes into the direction of the message rate (packet / sec)
Packet Output	Correspond to the outbound packet statistics of the port
Bytes Output	Corresponding port outbound byte statistics
5 Minute Output Rate(packets/sec)	Corresponding port 5 minutes outbound packet rate (packet / s)

1.1.1 Update and clear statistics

Select the corresponding port selection box, click “Update Statistics” to update the corresponding port statistics, as shown in Figure.

Options

Select all Clear all Inverse Update Statistics Single Port Transmit/Receive Rate Stat All Ports Transmit/Receive Flow Stat

Port	Input Stat						Output		
	Packets Stat	Bytes Stat	Input Rate(packets/sec)	Input Rate(bits/sec)	Errors	CRC	Packets Stat	Bytes Stat	Output Rate
<input checked="" type="checkbox"/> eth-0-1	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-2	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-3	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-4	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-5	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-6	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-7	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-8	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-9	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-10	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-11	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-12	0	0	0	0	0	0	0	0	0
<input checked="" type="checkbox"/> eth-0-13	0	0	0	0	0	0	0	0	0

Modify

Port

```
eth-0-1 eth-0-2 eth-0-3 eth-0-4 eth-0-5 eth-0-6 eth-0-7 eth-0-8 eth-0-9
eth-0-10 eth-0-11 eth-0-12 eth-0-13 eth-0-14 eth-0-15 eth-0-16
eth-0-17 eth-0-18 eth-0-19 eth-0-20 eth-0-21 eth-0-22 eth-0-23
eth-0-24 eth-0-25 eth-0-26 eth-0-27 eth-0-28 eth-0-29 eth-0-30
eth-0-31 eth-0-32 eth-0-33 eth-0-34 eth-0-35 eth-0-36 eth-0-37
eth-0-38 eth-0-39 eth-0-40
```

Figure 1-1 Update and clear statistics

Table 1-1 Update and clear statistics configuration

Configuration item	Description
Update Statistics	Update the corresponding port statistics
Clear Statistics	Clear the corresponding port statistics

1.1.1 Statistical details

Click the corresponding port name to enter the detailed statistics page of the port, as shown in Figure.

Detail

Packets Input	0
Bytes Input	0
Packets Output	0
Bytes Output	0
5 Minute Input Rate(packets/sec)	0
5 Minute Input Rate(bits/sec)	0
Input Unicast Packet	0
Input Broadcast Packet	0
Input Multicast Packet	0
Input Runts	0
Input Giants	0
Input Errors	0
Input CRC	0
Input Frame	0
Input Pause	0
5 Minute Output Rate(packets/sec)	0
5 Minute Output Rate(bits/sec)	0
Output Unicast Packet	0
Output Broadcast Packet	0
Output Multicast Packet	0
Output Errors	0
Output Pause	0

 Clear

 Refresh

 Close

Figure 1-1 statistical details

Table 1-1 Statistical details parameters

Parameter item	Description
Packets Input	Correspondent packets of incoming packets

Bytes Input	Corresponds to the incoming byte of the port statistics
Packets Output	Correspond to the outbound packet statistics of the port
Bytes Output	Corresponding port outbound byte statistics
5 Minute Input Rate(packets/sec)	Corresponding port 5 minutes into the direction of the message rate (packet / sec)
5 Minute Input Rate(bits/sec)	Corresponding port 5 minutes into the direction of the message rate (bits / sec)
Input Unicast Packet	Corresponds to the statistics of unicast packets in the incoming direction of the port
Input Broadcast Packet	Corresponds to the statistics of the broadcast packets in the incoming direction of the port
Input Multicast Packet	Correspond to the statistics of multicast packets in the inbound direction of the port
Input Runts	Corresponding port in the direction of the ultra-short frame statistics
Input Giants	Corresponding port in the direction of the large frame statistics
Input Errors	Corresponds to the statistics of the error frame in the incoming direction of the port
Input CRC	Corresponds to the statistics of the

USER GUIDE

PacketMAX Advanced Features | AF1G40AC

	CRC in the incoming direction of the port
Input Frame	Corresponds to the statistics of the total number of frames in the incoming direction of the port
Input Pause	Corresponds to the statistics of the Pause frame in the incoming direction of the port
5 Minute Output Rate(packes/sec)	Corresponding port 5 minutes outbound packet rate (packet / s)
5 Minute Output Rate (bits/sec)	Corresponding port 5 minutes outbound message rate (bits per second)
Output Unicast Packet	Correspond to the statistics of unicast packets in the outbound direction of the port
Output Broadcast Packet	Corresponds to the statistics of the broadcast packets in the outbound direction of the port
Output Multicast Packet	Correspond to the statistics of multicast packets in the outbound direction of the por
Output Errors	Corresponds to the statistics of the error frame in the outbound direction of the port
Output Pause	Corresponds to the statistics of the Pause frame in the outbound direction of the port

1.1 Link aggregation

This section describes how to configure and view static link aggregation ports.

1.1.1 Basic information

Click “Interface Management”>“Link Aggregation” to enter the link aggregation main page. You can view the basic information of link aggregation, as shown in Figure.

	#	Link Aggregation Name	Load Balance Mode	Protocol	Group State	Ports in Bundle	Member Ports	Max Ports
--	---	-----------------------	-------------------	----------	-------------	-----------------	--------------	-----------

Figure 1-1 Link aggregation

Table 1-1 link aggregation parameters

Configuration item	Description
#	Link aggregation number
Link Aggregation Name	Corresponding number of aggregated port names
Load Balance Mode	Corresponding number of load ports for aggregated ports, including:static, round-robin
Protocol	Corresponding number aggregation port protocol mode
Group State	Corresponds to the status of the numbered aggregation port
Ports in Bundle	Corresponding number The current number of bundled ports
Member Ports	Corresponding number of member ports
Max Ports	Corresponding number Maximum

	number of member ports
--	------------------------

1.1.1 Global configuration

Link aggregation global configuration, you can configure the load sharing hash field. Figure shows the configuration of the TAP V350 board and the link aggregation globally.

Global Configuration

Load Balance Hash Field	
dst-ip	<input checked="" type="button"/> on
dst-mac	<input type="button"/> off
dst-port-l4	<input checked="" type="button"/> on
gre-key	<input type="button"/> off
inner-dst-ip	<input type="button"/> off
inner-dst-mac	<input type="button"/> off
inner-dst-port-l4	<input type="button"/> off
inner-ip-protocol	<input type="button"/> off
inner-src-ip	<input type="button"/> off
inner-src-mac	<input checked="" type="button"/> on
inner-src-port-l4	<input type="button"/> off
ip-protocol	<input type="button"/> off
nvgre-flow-id	<input type="button"/> off
nvgre-vsld	<input type="button"/> off
src-ip	<input checked="" type="button"/> on
src-mac	<input type="button"/> off
src-port-l4	<input checked="" type="button"/> on
vxlan-vni	<input type="button"/> off

Load Balance Tunnel Hash Mode		
mode	<input type="button"/> both	<input checked="" type="button"/> outer
	<input type="button"/> inner	

Figure 1-1 Global configuration

Table 1-1 Global configuration

Configuration item	Description
dst-ip	Configure whether the load is balanced according to the destination IP address of the packet
dst-mac	Configure whether the load is balanced according to the destination MAC address of the packet
dst-port-l4	Whether the configuration is based on the TCP / UDP L4 destination port number load balancing
gre-key	Whether the configuration is balanced according to the key field of gre in the message
Inner-dst-ip	Whether the configuration is based on the IP address load balancing in the packet
inner-dst-mac	Whether the configuration is based on the MAC address load balancing in the packet
inner-dst-port-l4	Whether the configuration is based on the inner TCP / UDP L4 destination port number load balancing
inner-ip-protocol	Whether the configuration is balanced according to the inner IP protocol load in the packet
inner-src-ip	Whether the configuration is based on the load balancing of the inner source IP address of the packet

inner-src-mac	Whether the configuration is based on the load balancing of the inner source MAC address of the packet
inner-src-port-l4	Configure whether the load balancing is based on the inner port number of the L4 of inner tcp / udp in the packet
ip-protocol	Whether the configuration is balanced according to the IP protocol load in the packet
nvgre-flow-id	Whether the configuration matches the flow-id field of the nvgre packet in the packet
nvgre-vsld	Whether the configuration matches the vsid field of the nvgre packet in the packet
src-ip	Configure whether the load is balanced according to the source IP address in the packet
src-mac	Configure whether the load is balanced according to the source MAC address in the packet
src-port-l4	Configure whether the load balancing is based on the port number of the L4 of tcp / udp in the packet
vxlan-vni	Configure whether the load is balanced according to the vnilan of the vxlan in the packet
mode	Configure the Hash mode of load balance tunnel, includes both, outer and inner.

1.1.1 Link aggregation configuration

Add the aggregation group

Click “Add” to enter the aggregation group to increase the page, select the port and aggregation group, click “Submit” to complete the aggregation group to increase.

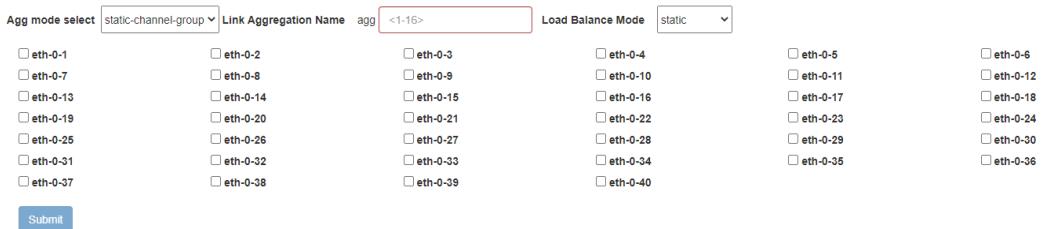


Figure 1-1 add the aggregation group

Delete the aggregation group

Select the number corresponding to the aggregation group and click xx to delete the corresponding numbered aggregation group, as shown in Figure.

	#	Link Aggregation Name	Load Balance Mode	Protocol	Group State	Ports in Bundle	Member Ports	Max Ports
<input checked="" type="checkbox"/>	1	agg1	static	static	L2	0	eth-0-1 eth-0-2 eth-0-3	16

Figure 1-1 delete the aggregation group

Configure the load sharing mode

Click “Load Balance Mode” to enter the configuration load sharing mode page, as shown in Figure.



Figure 1-1 load balance mode

Table 1-1 load balance mode configuration

Configuration item	Description
Agg	Configure the corresponding agg

Mode	Configure the load balancing mode for the corresponding agg, including:static , round-robin
------	---

1.1 Optical module status

This section focuses on the status of the optical module

1.1.1 Basic information

Click “Interface Management”>“Transceiver Status” to enter the main page of the optical module status, you can view the basic status of the optical module status, as shown in Figure.

Transceiver				
Port	Type	Vendor	PN	S/N

Figure 1-1 optical module status

Table 1-1 optical module status parameters

Parameter item	Description
Port	Corresponding port name
Type	Corresponds to the type of port optical module
Vendor	Corresponding to the port optical module manufacturers
PN	Corresponds to the part number of the port optical module
S/N	Corresponds to the serial number of the port optical module

2 Certification management

1.1 Overview

This chapter describes the authentication management on the switch.

1.1 AAA authentication

This section describes how to configure and view AAA authentication.

1.1.1 Basic information

Click “Authentication Management”>“AAA”to enter the main page of the authentication. This page can check the basic information of AAA authentication, as shown in Figure.




Figure 1-1 AAA authentication

Table 1-1 AAA authentication parameters

Parameter item	Description
#	Corresponding AAA authentication number
Method List Type	The number of the corresponding number
Name	Corresponding number of name

State	Corresponding to the status of the number
List	A list of the corresponding numbers, the list includes: none, local, tacplus, radius
Options	The corresponding number of options, including: delete

1.1.1 Global configuration

Click the “AAA Enable” button to select whether to enable AAA authentication, as shown in Figure.

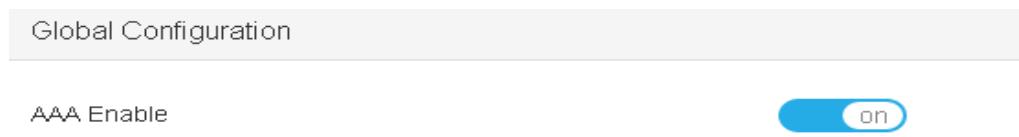


Figure 1-1 AAA authentication global configuration

1.1.1 Authentication configuration

Click the corresponding list of parameters to enter the authentication configuration page, as shown in Figure.

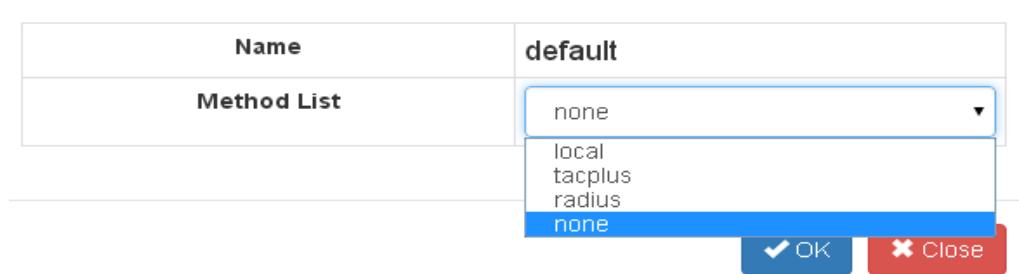


Figure 1-1 AAA authentication configuration

Table 1-1 authentication configuration parameters

Configuration item	Description
--------------------	-------------

Name	Displays the authentication configuration name is default
Method List	Configure the authentication method, including:none, tacplus, local, radius, line

1.1 Tacacs authentication

This section describes the configuration and viewing Tacacs authentication.

1.1.1 Basic information

Click “Authentication Management”>“Tacacs”to enter the Tacacs main page, this page can view the Tacacs authentication basic information, as shown in Figure.

Tacacs Server						
#	Server Host	VRF	Port	Timeout	Retries	Secret

Figure 1-1 Tacacs authentication


Table 1-1 Tacacs authentication parameters

Parameter item	Description
#	Corresponding Tacacs certification number
Server Host	Corresponding number Server host
Port	Corresponding number port number, default 49
Timeout	Corresponding numbering timeout, in seconds
Retries	Number of retries for the corresponding number

Secret	Corresponding number of keys
--------	------------------------------

1.1.1 Add the server

Click “Add Server” to enter the T server configuration page, as shown in Figure.

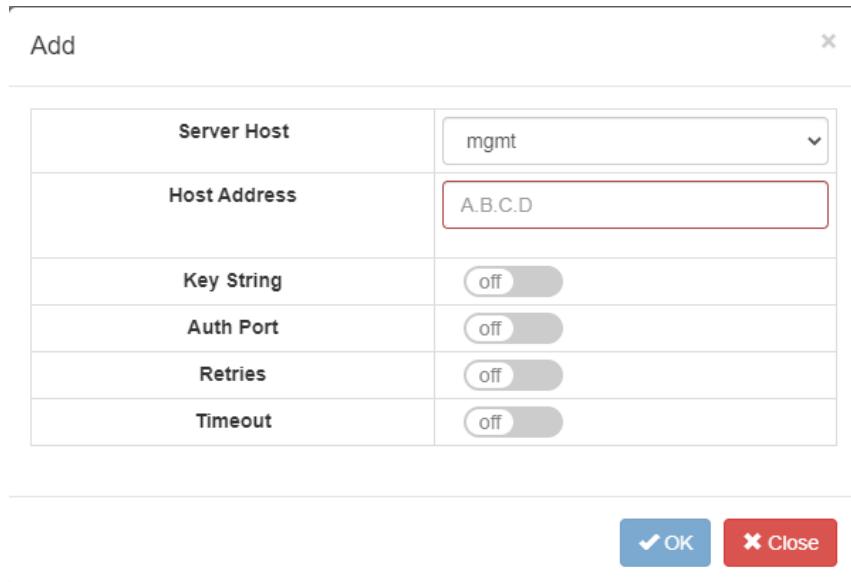

The screenshot shows a configuration dialog box titled "Add". It contains the following fields:

Server Host	mgmt
Host Address	A.B.C.D
Key String	off
Auth Port	off
Retries	off
Timeout	off

At the bottom right are two buttons: "OK" (blue) and "Close" (red).

Figure 1-1 add the server

Table 1-1 add server configuration

Configuration item	Description
Server Host	Configure the IP address of the Tacacs server
Key String	Enabler Key String
Value	Configure the specified key for the Tacacs server

1.1.1 Delete the server

Click the Delete button to complete the removal of the server configuration.

Table 1-1 delete the server


Configuration item	Description
	Delete the corresponding number of Tacacs servers

1.1 Radius authentication

This section describes how to configure and view Radius authentication.

1.1.1 Basic information

Click “Authentication Management”>” Radius”to enter the Radius main page, this page can view the Radius authentication basic information, as shown in Figure.

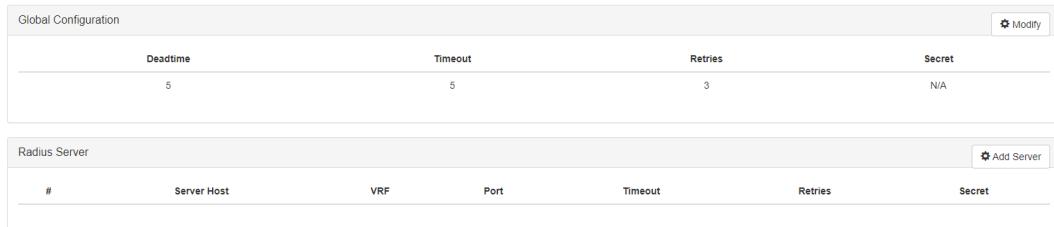

The screenshot shows two main sections: "Global Configuration" and "Radius Server".

- Global Configuration:** A table with columns: Deadtime, Timeout, Retries, and Secret. The Deadtime is set to 5, Timeout to 5, Retries to 3, and Secret is N/A. There is a "Modify" button at the top right.
- Radius Server:** A table with columns: #, Server Host, VRF, Port, Timeout, Retries, and Secret. There is an "Add Server" button at the top right.

Figure 1-1 Radius authentication

Table 1-1 global configuration parameters


Parameter item	Description
Deadtime	Display the dead time of Radius, in minutes
Timeout	Show Radius timeout, in seconds
Retries	Show the number of retries for Radius
Secret	Displays the key for Radius. If no key is displayed N/A

Table 1-1 Radius authentication parameters

Parameter item	Description
#	Corresponds to the number of the Radius server
Server Host	The corresponding Radius server IP address
Port	Corresponding number of the Radius server port number, default 1812
Secret	Displays the key for Radius. If no key is displayed N/A

1.1.1 Add the server

Click “add server” to enter the R server configuration page, as shown in Figure.

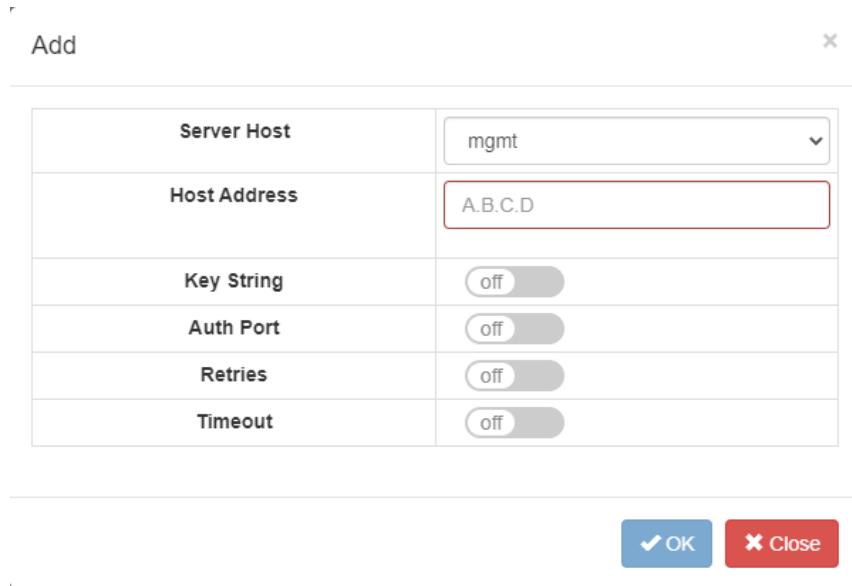

The screenshot shows a modal dialog box titled "Add". It contains a form for configuring a new server. The "Server Host" field is set to "mgmt". The "Host Address" field is set to "A.B.C.D" and has a red border, indicating it is the active or selected field. Below these are four toggle switch controls labeled "Key String", "Auth Port", "Retries", and "Timeout", all currently set to "off". At the bottom of the dialog are two buttons: a blue "OK" button and a red "Close" button.

Figure 1-1 add the server

Table 1-1 add server configuration

Configuration item	Description
Server Host	Configure the IP address of the Radius

	server
--	--------

1.1.1 Delete the server

Click the Delete button to complete the removal of the server configuration

Table 1-1 delete the server

Configuration item	Description
	Delete the corresponding Radius server

2 Tap management

1.1 Overview

This chapter describes the tap management on the switch.

1.1 TAP

1.1.1 Tap statistics

Click “Tap Management”>“Tap” to enter the Tap main page, this page can view the Tap statistics, as shown in Figure.

TAP Statistics					
#	TAP Id	TAP Group Name	TAP Group Description	TAP Group truncation	Options
1	10	TG1	N/A	NO	

Figure 1-1 Tap statistics

Table 1-1 Tap statistics parameters

Parameter item	Description
#	Corresponds to Tap number
Tap Id	The corresponding number of Tap ID
Tap Group Name	The corresponding group name of the tap
Tap Group Description	Correspond to the description of Tap
Tap Group truncation	Whether the corresponding tap is

	enabled for truncation
Options	Corresponding to the number of Tap options, options include: delete

1.1.1 Global configuration

On the main page of Tap statistics. Click xx, xx, xx can be the corresponding global configuration.

Add a set of Tap

Click “Add Tap Group”, you can enter the page to increase Tap, as shown in Figure.

Tap Group Name	Configure group name
Tap Group ID	0
✓ OK ✗ Close	

Figure 1-1 add Tap

Table 1-1 add Tap configuration

Configuration item	Description
Tap Group Name	Configure the Tap group name
Tap Group ID	Configure the Tap ID

Message truncated

Click “Truncation” to enter the page where the configuration message is truncated, as shown in Figure.

×	
Truncation Length	
Truncation Enable	on
64 ~ 144	
✓ OK ✗ Close	
Garland T /support	

Figure 1-1 message truncated

Table 1-1 message truncated configuration

Configuration item	Description
Truncation Enable	Configure whether to enable packet truncation
Truncate length	Configure the truncation of packets (64~144)

Timestamp

Click “Timestamp” to enter the page with configuration timestamp, as shown in Figure.



The screenshot shows a configuration interface for timestamping. At the top, there is a toggle switch labeled "Timestamp Enable" with the value "on". Below it are three input fields: "dst-mac" containing "0000.0000.0000", "src-mac" containing "0000.0000.0000", and "Type" containing "0x0". At the bottom right are two buttons: a blue "OK" button with a checkmark icon and a red "Close" button with a cross icon.

Figure 1-1 timestamp

Table 1-1 timestamp configuration

Configuration item	Description
Timestamp Enable	Configure whether to enable timestamp
dst-mac	Configure the destination MAC with the timestamp message
src-mac	Configure the source MAC with the timestamp message
Type	Configure the Ethernet type to carry

	timestamp packets
--	-------------------

1.1.1 Tap statistics configuration

Click on the corresponding tap information, enter the corresponding number of Tap information configuration.

Attribute configuration

Click on the Tap group name information to enter the Tap property configuration, see section “Attribute configuration”.

Describe configuration

Click on Tap’s description to enter the Tap description configuration, as shown in Figure.



Figure 1-1 Tap description

Table 1-1 Tap description configuration

Configuration item	Description
Enable	Whether the accessories are enabled
Tap Group Description	Configure the description of Tap

Option configuration

Click the Tap option to delete the corresponding tap.

Table 1-1 Tap option configuration

Configuration item	Description
	Delete the corresponding tap

1.1.1 Attribute information

Click the Tap group name information to enter the Tap's attribute information page.

Incoming direction information

On the Tap attribute page, click xx to view the Tap orientation information, as shown in Figure.



#	Port	Inner Match	Untag	VLAN mark	Truncation	edit-macda	edit-mcsa	edit-ipda	edit-ipsa	edit-vlan	Options
1	eth-0-31	N/A	Disable	N/A	Disable	N/A	N/A	N/A	N/A	N/A	

Figure 1-1 incoming direction information

Table 1-1 incoming direction parameters

Parameter item	Description
#	Configure the port number
Port	Corresponding number of port names
Inner Matche	Match the number of the inner match name
Untag	Corresponding number of VLAN stripping
VLAN mark	Corresponding number of VLAN tags
Truncation	whether the corresponding truncation

	is enabled
Edit-macda	Corresponding number Edit the destination MAC
Edit-macs	Corresponding number Edit the source MAC
Edit-ipda	Corresponding number Edit the destination IP
Edit-ipsa	Corresponding number Edit the source IP
Edit-vlan	Corresponding number Edit the VLAN
Options	The corresponding number of options, including: delete

Out of direction information

On the Tap attribute page, click xx to view the Tap outbound information, as shown in Figure.



#	Port	Timestamp	Options
1	eth-0-2	NO	

Figure 1-1 out of direction information

Table 1-1 out of direction parameters

Parameter item	Description
#	Configure the port number
Port	Corresponding number of port names
Timestamp	Corresponding number timestamp


Options	The corresponding number of options, including: delete
---------	--

Attribute configuration

On the Tap's Properties page, click "Add" to enter the Tap property configuration page.

Incoming direction configuration

In the Tap's attribute information page, select "ingress" in the direction to enter the inbound configuration, as shown in Figure.

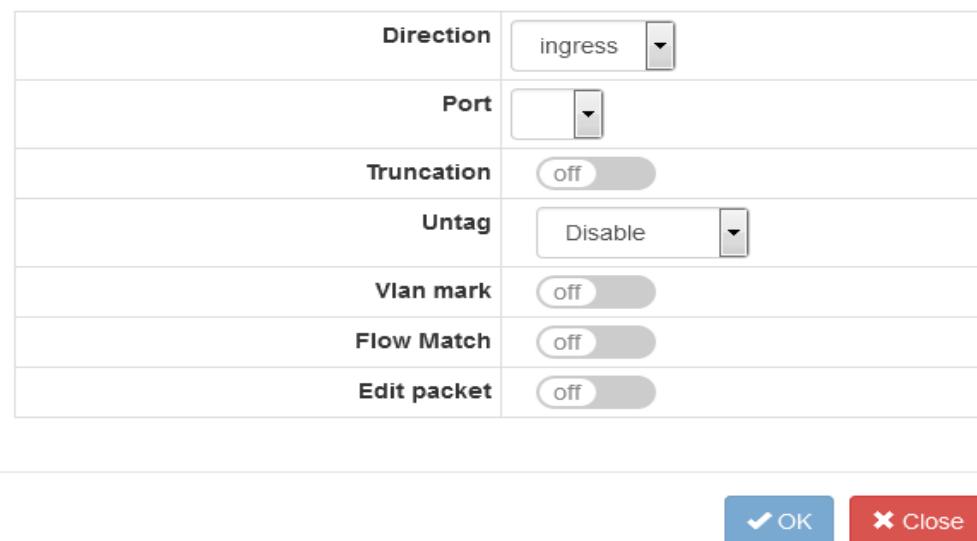

Direction	<input style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: white;" type="button" value="ingress"/>
Port	<input style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: white;" type="button"/>
Truncation	<input checked="" style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: #e0e0e0;" type="button"/>
Untag	<input style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: white;" type="button" value="Disable"/>
Vlan mark	<input checked="" style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: #e0e0e0;" type="button"/>
Flow Match	<input checked="" style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: #e0e0e0;" type="button"/>
Edit packet	<input checked="" style="border: 1px solid #ccc; padding: 2px 5px; width: 100%; height: 25px; font-size: 10px; font-weight: bold; background-color: #e0e0e0;" type="button"/>

Figure 1-1 incoming direction configuration

Table 1-1 incoming direction configuration

Configuration item	Description
Direction	The direction of the Tap port, the direction includes:ingress and egress
Port	Configure the corresponding port

Truncation	Configure whether to enable packet truncation. If enabled, all subsequent configuration items will be canceled, as shown in Figure “enable packet truncation r”
Untag	Configure whether to enable VLAN stripping. If enabled, the VLAN tag configuration item will be canceled. As shown in Figure “enable VLAN stripping”
VLAN mark	Configure whether to enable VLAN tagging. If enabled, the VLAN stripping configuration item will be canceled
Flow Match	Configure whether to enable inner layer matching. If enabled, select the corresponding flow table. The edit message configuration item will be canceled, as shown in Figure “enable inner layer matching”
Edit packet	Configure whether to enable the editing packet. If enabled, the configuration of the editing packet is shown in Table “edit the message configuration”. The configuration of the inner layer will be canceled, as shown in Figure “enable editing messages”

Direction	ingress ▾
Port	eth-0-1 ▾
Truncation	<input checked="" type="checkbox"/> on

✓ OK ✗ Close

Figure 1-1 enable packet truncation

Direction	ingress ▾
Port	eth-0-1 ▾
Truncation	<input type="checkbox"/> off
Untag	double-vlan ▾
Flow Match	Disable
Edit packet	double-vlan outer-vlan inner-vlan

✓ OK ✗ Close

Figure 1-1 enable VLAN stripping

Direction	ingress
Port	eth-0-1
Truncation	off
Untag	Disable
Vlan mark	off
Flow Match	on
Flow	flow1

OK **Close**

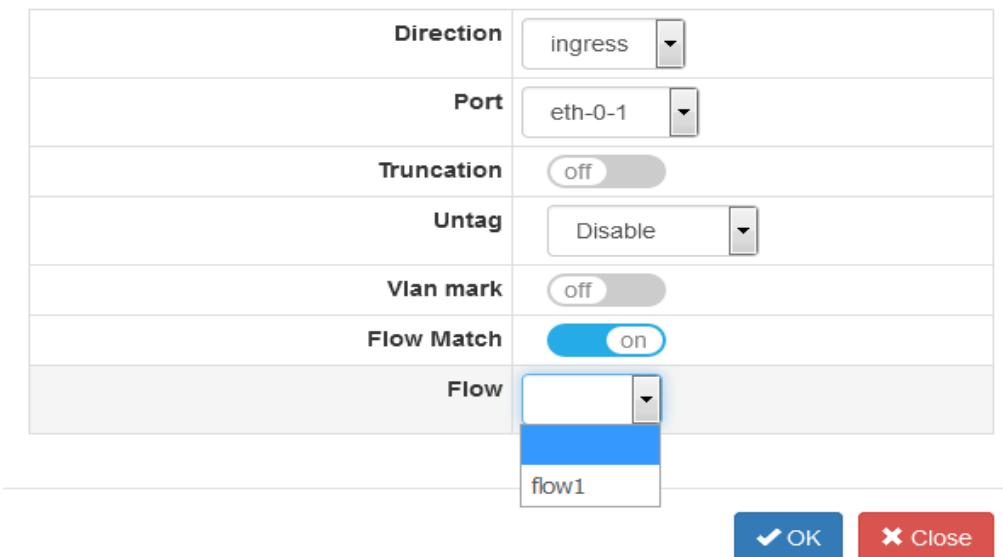


Figure 1-1 enable inner layer matching

Direction	ingress
Port	eth-0-1
Truncation	off
Untag	Disable
Vlan mark	off
Edit packet	on
Edit-macda	on
Dst-mac	mac in HHHH.HHHH.HH
Edit-macs	on
Src-mac	mac in HHHH.HHHH.HH
Edit-ipda	on
Dst-ip Type	ipv4
Dst-ip	A.B.C.D
Edit-ipsa	on
Src-ip Type	ipv4
Src-ip	A.B.C.D
Edit-vlan	on
ID	1~4094

✓ OK
✗ Close

Figure 1-1 enable editing messages


Table 1-1 edit the message configuration

Configuration item	Description
Edit packet	Configure whether to enable editing packets

Edit-macda	Configure whether to enable the edit destination MAC address
Dst-mac	Configure the destination MAC
Edit-macs	Configure whether to enable the edit source MAC address
Src-mac	Configure the source MAC
Edit-ipda	Configure whether to enable the edit destination IP address
Src-ip	Configure the destination IP
Edit-ipsa	Configure whether to enable the edit source IP address
Src-ip	Configure the source IP
Edit-vlan	Configure whether to enable the edit VLAN
ID	Configure the VLAN ID

Out of direction configuration

On the Tap property configuration page, select “egress” in the direction to enter the inbound configuration, as shown in Figure.

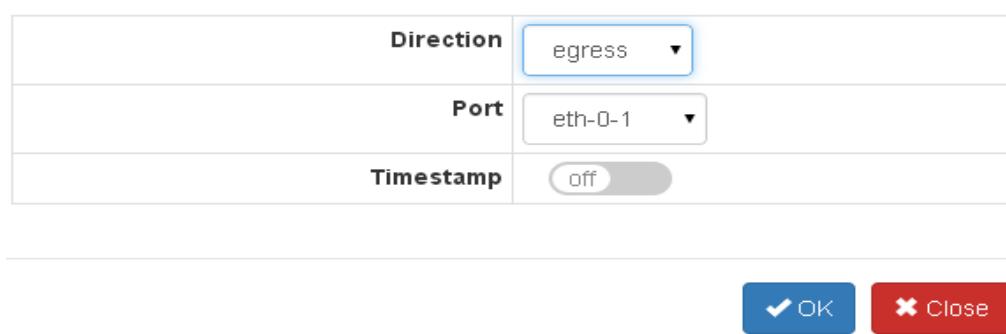

The screenshot shows a configuration dialog with the following fields:

- Direction:** A dropdown menu set to "egress".
- Port:** A dropdown menu set to "eth-0-1".
- Timestamp:** A switch button set to "off".
- Buttons at the bottom:** "OK" (blue button with checkmark) and "Close" (red button with X).

Figure 1-1 out of direction configurations

Table 1-1 out of direction configuration

Configuration item	Description
Direction	The direction of the Tap port, the direction includes:ingress and egress
Port	Configure the corresponding port
Timestamp	Configure whether to enable timestamp

1.1 Flow

This section describes the flow chart statistics and their properties of the configuration and view.

1.1.1 Flow statistics

Click “Tap Management”>“Flow” to enter the main page of the flow table. This page can view the statistics of the flow table, as shown in Figure.

#	Flow Name	Remark	Decap	Options
1	f1	N/A	Disable	 

Figure 1-1 flow statistics

Table 1-1 flow statistics parameters

Parameter item	Description
#	Correspond to the number of the flow statistics
Flow Name	Corresponding to the name of the flow
Remark	Corresponding to the description of the flow
Decap	Does the corresponding number flow


	enable decapsulation.
Options	The options for the corresponding numbering flow include options for configuration and deletion

1.1.1 Global configuration

In the main page of the flow chart statistics, click xx to perform the corresponding global configuration.

Add a class of flow

Click “Add Flow” to enter the main page of the flow table. This page can view the statistics of the flow table, as shown in Figure.

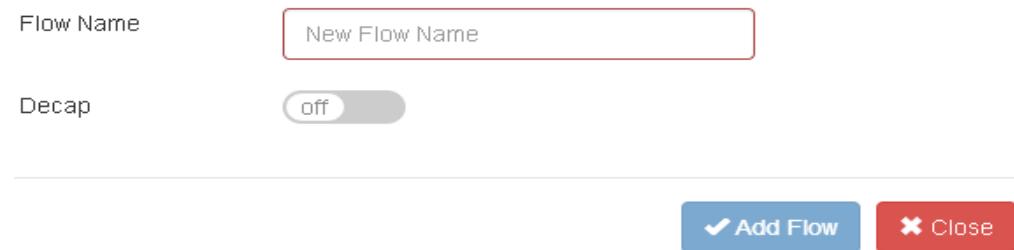

The screenshot shows a user interface for adding a flow. At the top, there is a field labeled "Flow Name" with the placeholder "New Flow Name". Below it is a switch labeled "Decap" which is currently set to "off". At the bottom right, there are two buttons: a blue "Add Flow" button with a checkmark icon, and a red "Close" button with a close icon.

Figure 1-1 add a class of flow

Table 1-1 add a class of flow configuration

Configuration item	Description
Flow Name	Configure the names of such flow
Decap	Configure whether to enable decapsulation

1.1.1 Flow statistics configuration

Click on the corresponding number of flow chart information, enter the corresponding number of flow table information configuration.

Flow information

Click the name information of the flow table to view the specific information of the flow table, as shown in Figure.

#	Flow Entry	Options
1	sequence-num 10 permit any src-ip any dst-ip any	

Figure 1-1 flow information

Table 1-1 flow information parameters

Parameter item	Description
#	Corresponding to the flow number
Flow Entry	The corresponding number of flow
Options	The corresponding number of options, including: delete

Describe the configuration

Click the description of the flow table to view the description of the flow table, as shown in Figure.

Enable
 on

Remark

Flow description

 OK
 Close

Figure 1-1 describe the information

Table 1-1 describe the configuration

Configuration item	Description
Enable	Configure whether to enable the

	description configuration
Remark	Configure the description of the flow

Option configuration

Click the flow table option information to enter the properties of the flow table configuration and delete the configuration.

Table 1-1 options configuration

Configuration item	Description
	Enter the properties of the flow table configuration, see section “Attribute configuration”
	Delete the corresponding numbered flow

1.1.1 Attribute configuration

Click on the flow table option information, enter the flow table attribute configuration, as shown in Figure.

Match Rule	
Action	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="permit"/>
IP protocol number	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="any"/>
Filter Type	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="ipv4"/>
Ether Type	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Src-ip	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Dst-ip	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
DSCP	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Ip-precedence	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Options	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Fragment	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Src-mac	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Dst-mac	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
COS	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Inner COS	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
VLAN	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Inner VLAN	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>

Action	
Truncation	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Untag	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="Disable"/>
Vlan mark	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Edit packet	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Add I2gre	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Add I3gre	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Add Vxlan	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Add Erspan-type-1	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>
Add Erspan-type-2	<input style="width: 100px; height: 25px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px; font-size: 10px; font-weight: bold; background-color: #f0f0f0;" type="button" value="off"/>

Figure 1-1 attribute configuration

Table 1-1 attribute configuration

Configuration item	Description
Action	Configure the behavior of the flow table on the port, including: permit and deny
IP protocol number	Select the corresponding IP protocol number, including: any, tcp, udp, gre, nvgre, icmp, igmp, mpls, pppoe(vxlan is udp protocol), you can also select num, enter 0 ~ 255 protocol number
Filter Type	Configure filter type, including: ipv4, ipv6
Ether Type	Configure whether enable or disable ethertype; if enables, then needs to configure the value and wildcard.
Src-IP	Configure the source IP address; if enables, it needs to configure the source ip address and source wildcard.
Dst-IP	Configure the destination IP address; if enables, it needs to configure the destination ip address and destination wildcard
DSCP	Configure to enable or disable DSCP; if enables, it needs to configure a value between 0 and 63
Ip-precedence	Configure the IP precedence
Options	Configure to enable or disable options
Fragment	Configure to enable or disable fragment

Src-mac	Configure the source MAC address. If enabled, you need to select the corresponding type and enter the source MAC address, as shown in Figure “source MAC”
Dst-mac	Configure the destination MAC address. If enabled, you need to select the corresponding type and enter the destination MAC address, as shown in Figure “destination MAC”
COS	Configure enable or disable COS, if enables, it needs to setup the COS value which is between 0 and 7.
Inner COS	Configure enable or disable COS, if enables, it needs to setup the COS value which is between 0 and 7.
VLAN	If the VLAN is enabled, enable ID and anti-mask if it is enabled, as shown in Figure “VLAN”
Inner VLAN	If the inner VLAN is enabled, enable ID and anti-mask if it is enabled
Strip-header	Configure enable or disable COS Strip-header, and Strip-header is only support udp,gre,nvgre,mpls,pppoe protocol, as shown in Figure “Strip-header”
Truncation	Configure whether to enable truncation. If enables, the rest of the configuration items will disappear
Untag	Configure whether to enable VLAN

	stripping. It includes: disable, double-vlan, outer-vlan, inner-vlan
VLAN mark	If the VLAN mark is enabled, the untag will be disappeared
Edit packet	If the Edit packet is enabled, as shown in Figure “enable editing messages”
Add L2gre	Configure whether to enable Layer 2 GRE encapsulation
Add L3gre	Configure whether to enable Layer 3 GRE encapsulation
Add Vxlan	Configure whether to enable VXLAN encapsulation
Add Erspan-type-1	Configure whether to enable Erspan-type-1 encapsulation
Add Erspan-type-2	Configure whether to enable Erspan-type-2 encapsulation

Src-mac	<input checked="" type="checkbox"/> on
Type	<input type="radio"/> any <input checked="" type="radio"/> host <input type="radio"/> MAC
Src-mac	mac in HHHH.HHHH.HH

Figure 1-1 source MAC

Dst-mac	<input checked="" type="checkbox"/> on
Type	<input type="radio"/> any <input checked="" type="radio"/> host <input type="radio"/> MAC
Dst-mac	mac in HHHH.HHHH.HH

Figure 1-1 destination MAC

VLAN	<input checked="" type="checkbox"/> on
ID	<input type="text" value="1~4094"/>
Wildcard	<input type="text" value="0x0"/>

Figure 1-1 VLAN

Action	
Strip-header	<input checked="" type="checkbox"/> on
Strip-position	<input checked="" type="checkbox"/> on
Type	<input checked="" type="radio"/> L2 <input type="radio"/> L3 <input type="radio"/> L4
Strip-offset	<input checked="" type="checkbox"/> on
Value	<input type="text" value="0~30"/>
Vlan mark	<input type="checkbox"/> off
Edit packet	<input checked="" type="checkbox"/> on
Add-macaddr	<input type="checkbox"/> off
Edit-macda	<input checked="" type="checkbox"/> on
Dst-mac	<input type="text" value="a.a.a"/>
Edit-macs	<input checked="" type="checkbox"/> on
Src-mac	<input type="text" value="b.b.b"/>
Edit-ipda	<input type="checkbox"/> off
Edit-ipsa	<input type="checkbox"/> off
Edit-vlan	<input type="checkbox"/> off

OK
 Close

Figure 1-1 Strip-header

Match Rule	
Action	permit ▾
IP protocol number	any ▾
Filter Type	ipv4 ▾
Ether Type	off
Src-ip	<input checked="" type="checkbox"/> on
Source IP	1.1.1.1
Source wildcard	0.0.0.0
Dst-ip	off
DSCP	off
Ip-precedence	off
Options	off
Fragment	off
Src-mac	off
Dst-mac	off
COS	off
Inner COS	off
VLAN	off
Inner VLAN	off

Action	
Truncation	<input checked="" type="checkbox"/> on

OK
 Close

Figure 1-1 enable packet truncation

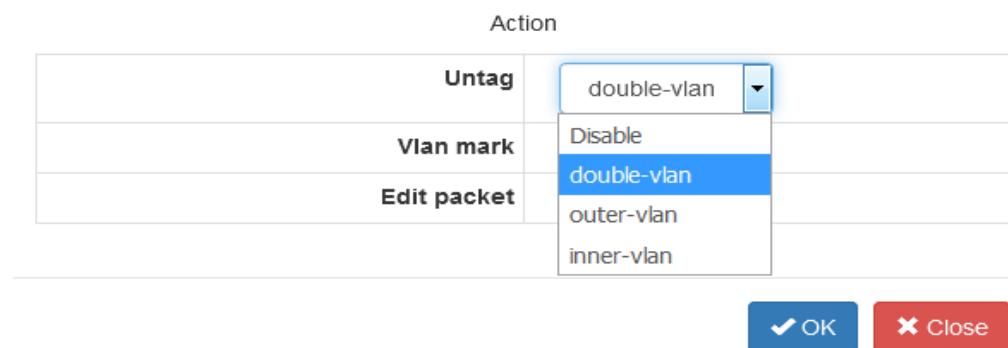


Figure 1-1 enable VLAN stripping

Action	
Untag	<input type="button" value="Disable"/>
Vlan mark	<input type="button" value="off"/>
Edit packet	<input checked="" type="button" value="on"/>
Add-macaddr	<input type="button" value="off"/>
Edit-macda	<input checked="" type="button" value="on"/>
Dst-mac	mac in HHHH.HHHH.HH
Edit-macs	<input checked="" type="button" value="on"/>
Src-mac	mac in HHHH.HHHH.HH
Edit-ipda	<input checked="" type="button" value="on"/>
Dst-ip Type	<input type="button" value="ipv4"/>
Dst-ip	A.B.C.D
Edit-ipsa	<input checked="" type="button" value="on"/>
Src-ip Type	<input type="button" value="ipv4"/>
Src-ip	A.B.C.D
Edit-vlan	<input checked="" type="button" value="on"/>
Type	<input type="button" value="Add"/> <input type="button" value="Edit"/>
ID	1~4094

Figure 1-1 enable editing messages

Action

Add L2gre	<input checked="" type="checkbox"/> on
L2gre-src-ip	A.B.C.D
L2gre-dest-ip	A.B.C.D
L2gre-dest-mac	mac in HHHH.HHHH.HH
L2gre-key-length	24 <input type="button" value="▼"/>
L2gre-key-num	1~16777215 <input type="button" value="▲"/>

Figure 1-1 Add L2gre

Action

Add L3gre	<input checked="" type="checkbox"/> on
L3gre-src-ip	A.B.C.D
L3gre-dest-ip	A.B.C.D
L3gre-dest-mac	mac in HHHH.HHHH.HH

Figure 1-1 Add L3gre

Action	
Add Vxlan	<input checked="" type="button"/> on
Vxlan-dest-mac	mac in HHHH.HHHH.HH
Vxlan-src-ip	A.B.C.D
Vxlan-dest-ip	A.B.C.D
Vxlan-dst-port	<input type="button"/> off
Vxlan-src-port	<input type="button"/> off
Vxlan-vni-num	1~16777215 <input type="button"/>

OK Close

Figure 1-1 Add Vxlan

Action	
Add Erspan-type-1	<input checked="" type="button"/> on
Erspan-type-1-dest-mac	mac in HHHH.HHHH.HH
Erspan-type-1-src-ip	A.B.C.D
Erspan-type-1-dest-ip	A.B.C.D

OK Close

Figure 1-1 Add Erspan-type-1

Action	
Add Ersptype-2	<input checked="" type="button"/> on
Ersptype-2-dest-mac	mac in HHHH.HHHH.HH
Ersptype-2-src-ip	A.B.C.D
Ersptype-2-dest-ip	A.B.C.D
Ersptype-2-spanid	1~1023 <input type="button"/>

OK Close

Figure 1-1 Add Ersptype-2

Table 1-1 enable editing messages configuration

Configuration item	Description
Edit packet	Configure whether to enable editing packets
Add-macaddress	Configure whether to enable to add mac address, if enable, then needs to configure source mac and destination mac address
Edit-macda	Configure whether to enable the edit destination MAC address
Dst-mac	Configure the destination MAC
Edit-macs	Configure whether to enable the edit source MAC address
Src-mac	Configure the source MAC
Edit-ipda	Configure whether to enable the edit destination IP address

Dst-ip Type	Configure destination ip type
Dst-ip	Configure destination ip
Edit-ipsa	Configure whether to enable the edit source IP address
Src-ip Type	Configure source ip type
Src-ip	Configure the source IP
Edit-vlan	Configure whether to enable the edit VLAN
Type	Configure Type, including add and edit
ID	Configure the VLAN ID

1.1 Inner layer matching

This section describes the configuration and view of the statistics of the inner flow chart and its properties

1.1.1 Inner flow statistics

Click “Tap Management”>“Inner Match” to enter the inner layer matching the main page, this page can view the inner flow chart statistics, as shown in Figure.

#	Flow Name	Remark	Options
1	acl1	N/A	 

Figure 1-1 inner flow statistics

Table 1-1 inner flow statistics parameters

Parameter item	Description
#	Corresponding to the inner flow statistics number

Flow Name	Corresponds to the name of the inner stream
Remark	Corresponding number description of inner layer flow
Options	The options for the numbering inner layer flow table include: configuration properties and deletion

1.1.1 Global configuration

In the inner flow chart statistics on the main page, click “Add Inner-match Flow” can be the corresponding global configuration.

Add a class of inner flow

Click “Add Flow” to enter the main page of the flow table. This page can view the statistics of the flow table, as shown in Figure.



The screenshot shows a user interface for adding a flow. On the left, there is a label "Flow Name". To its right is a text input field with a red border, containing the text "New Flow Name". Below this input field is a horizontal line. At the bottom right of the interface are two buttons: a blue button labeled "✓ Add Flow" and a red button labeled "✗ Close".

Figure 1-1 add a class of inner flow

Table 1-1 add a class of inner flow configuration

Configuration item	Description
Flow Name	Configure the names of such inner stream

1.1.1 Inner flow statistics configuration

Click on the corresponding number of the inner flow chart information, enter the corresponding number of inner flow chart information configuration

Inner flow information

Click the name information of the inner stream table to view the specific information of the inner flow chart, as shown in Figure.

#	Flow Entry	Options
1	sequence-num 1 match any src-ip any dst-ip any	

Figure 1-1 inner flow information

Table 1-1 inner flow information parameters

Parameter item	Description
#	Corresponding to the inner flow meter number
Flow Entry	The corresponding number of flow
Options	The corresponding number of options, including: delete

Describe the configuration

Click the description of the inner flow meter to view the description of the inner flow table, as shown in Figure.

Enable
 on

Remark

Flow description

 OK
 Close

Figure 1-1 describe the configuration

Table 1-1 describe the configuration

Configuration item	Description
Enable	Configure whether to enable the description configuration
Remark	Configure the description of the inner flow meter

Option configuration

Click the option information of the inner flow table to enter the properties of the inner flow table and delete the configuration .

Table 1-1 option configuration

Configuration item	Description
	Enter the properties of the flow table configuration, see section “Attribute configuration”
	Delete the inner stream table for the corresponding number

1.1.1 Attribute configuration

Click the “+” symbol under “Options”, enter the corresponding flow attribute configuration, as shown in Figure.

IP protocol number	<input type="button" value="any"/>
Filter TYPE	<input type="button" value="ipv4"/>
Ether Type	<input type="button" value="off"/>
src-ip	<input type="button" value="off"/>
dst-ip	<input type="button" value="off"/>
DSCP	<input type="button" value="off"/>
Ip-precedence	<input type="button" value="off"/>
Options	<input type="button" value="off"/>
Fragment	<input type="button" value="off"/>
src-mac	<input type="button" value="off"/>
dst-mac	<input type="button" value="off"/>
COS	<input type="button" value="off"/>
Inner COS	<input type="button" value="off"/>
VLAN	<input type="button" value="off"/>
Inner VLAN	<input type="button" value="off"/>

Figure 1-1 acl attribute configuration

Table 1-1 attribute configuration

Configuration item	Description
IP protocol number	Select the corresponding IP protocol number, including: any, tcp, udp, icmp and igmp. You can also select num, enter 0 ~ 255 protocol number
Filter Type	Configure filter type, including: ipv4, ipv6
Ether Type	Configure Ethertype

Src-IP	Configure the source IP address
Dst-IP	Configure the destination IP address
DSCP	Configure to enable DSCP
Ip-precedence	Configure the IP precedence
Options	Configure enable or disable options
Fragment	Configure enable or disable fragment
Src-mac	Configure the source MAC address. If enabled, you need to select the corresponding type and enter the source MAC address, as shown in the following Figure “source MAC”
Dst-mac	Configure the destination MAC address. If enabled, you need to select the corresponding type and enter the destination MAC address, as shown in the followingFigure “destination MAC”
COS	Configure to enable or disable COS
Inner COS	Configure to enable or disable inner COS
VLAN	If the VLAN is enabled, enable ID and anti-mask if it is enabled, as shown in the followingFigure “VLAN”
Inner VLAN	Configure to enable or disable Inner VLAN. If enables, it needs to setup inner VLAN ID and wildcar

src-mac	<input checked="" type="checkbox"/> on
Type	<input checked="" type="radio"/> any <input type="radio"/> host <input type="radio"/> MAC
src-mac	mac in HHHH.HHHH.HH

Figure 1-1 source MAC

dst-mac	<input checked="" type="checkbox"/> on
Type	<input checked="" type="radio"/> any <input type="radio"/> host <input type="radio"/> MAC
dst-mac	mac in HHHH.HHHH.HH

Figure 1-1 destination MAC

VLAN	<input checked="" type="checkbox"/> on
ID	1~4094
Wildcard	0x0

Figure 1-1 VLAN

1.1 Access control list

This section describes the configuration and view of the statistics of the access control list and its attributes.

1.1.1 Access control list statistics

Click “Tap Management”>”Acl”to enter the access control list main page, this page can view the access control list statistics, as shown in Figure.

#	Name	Remark	Options
1	acl	N/A	

Figure 1-1 access control list statistics

Table 1-1 access control list statistics parameters

Parameter item	Description
#	The number of the corresponding access control list statistics
Name	Corresponds to the name of the access control list
Remark	Correspondence number access control list description
Options	Corresponding number access control list options, options include: configuration properties and delete

1.1.1 Global configuration

In the main page of the access control list statistics, click “Add Acl” to perform the corresponding global configuration

Add access control list

Click “Add Acl”, you can enter the page to increase the access control list, as shown in Figure.

Name	New ACL Name
✓ Add Acl ✗ Close	

Figure 1-1 add access control list

Table 1-1 add access control list configuration

Configuration item	Description
--------------------	-------------

Name	Configure to increase the name of the access control list
------	---

1.1.1 Access control list configuration

Click on the corresponding number to increase the access control list information, enter the corresponding number of access control list to increase the information configuration.

Access control list information

Click to increase the name of the access control list information, you can view the specific information to increase the access control list, as shown in Figure.

#	Entry	Options
1	sequence-num 10 permit any src-ip any dst-ip any	

Figure 1-1 access control list information

Table 1-1 access control list information parameters

Parameter item	Description
#	Corresponds to the access control list number
Entry	Corresponding number entry
Options	The corresponding number of options, including: delete

Describe the configuration

Click the description of the access control list to view the description of the access control list, as shown in Figure.

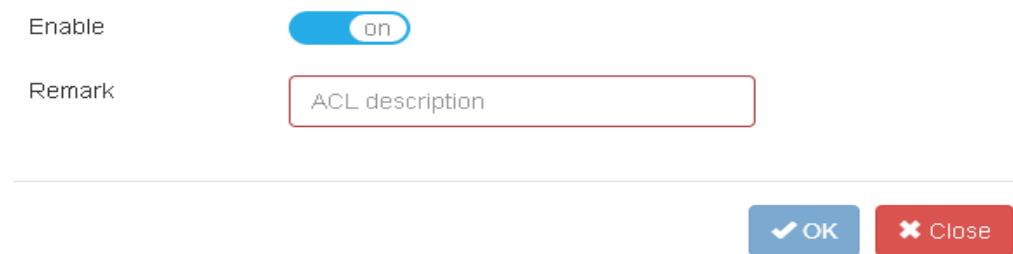


Figure 1-1 describe the configuration

Table 1-1 describe the configuration

Configuration item	Description
Enable	Configure whether to enable the description configuration
Remark	Configure a description of the access control list

Option configuration

Click the access control list option to access the configuration and delete configuration of the access control list.

Table 1-1 option configuration

Configuration item	Description
	Enter the attribute configuration of the access control list see section “Attribute configuration”
	Delete the access control list for the corresponding number

1.1.1 Attribute configuration

Click the “+” symbol under “Options”, enter the corresponding ACL attribute configuration, as shown in Figure.

Add

Action	permit
IP protocol number	any
Filter TYPE	ipv4
Ether Type	off
Src-ip	off
Dst-ip	off
DSCP	off
Ip-precedence	off
Options	off
Fragment	off
Src-mac	off
Dst-mac	off
COS	off
Inner COS	off
VLAN	off
Inner VLAN	off

✓ OK
✗ Close

Figure 1-1 acl attribute configuration

Table 1-1 attribute configuration

Configuration item	Description
Action	Configure the behavior of the flow

	table on the port, including: permit and deny
IP protocol number	Select the corresponding IP protocol number, including: any, tcp, udp, you can also select num, enter 0 ~ 255 protocol number
Filter Type	Configure filter type, including: ipv4, ipv6
Ether Type	Configure Ethertype
Src-IP	Configure the source IP address
Dst-IP	Configure the destination IP address
DSCP	Configure to enable DSCP
Ip-precedence	Configure the IP precedence
Options	Configure enable or disable options
Fragment	Configure enable or disable fragment
Src-mac	Configure the source MAC address. If enabled, you need to select the corresponding type and enter the source MAC address, as shown in the following Figure “source MAC”
Dst-mac	Configure the destination MAC address. If enabled, you need to select the corresponding type and enter the destination MAC address, as shown in the followingFigure “destination MAC”
COS	Configure to enable or disable COS
Inner COS	Configure to enable or disable inner COS

VLAN	If the VLAN is enabled, enable ID and anti-mask if it is enabled, as shown in the followingFigure “VLAN”
Inner VLAN	Configure to enable or disable Inner VLAN. If enables, it needs to setup inner VLAN ID and wildcar

Src-mac	<input checked="" type="checkbox"/> on
Type	any <input type="checkbox"/> host <input checked="" type="checkbox"/> MAC
Src-mac	mac in HHHH.HHHH.HH

Figure 1-1 source MAC

Dst-mac	<input checked="" type="checkbox"/> on
Type	any <input type="checkbox"/> host <input checked="" type="checkbox"/> MAC
Dst-mac	mac in HHHH.HHHH.HH

Figure 1-1 destination MAC

VLAN	<input checked="" type="checkbox"/> on
ID	1~4094
Wildcard	0x0

Figure 1-1 VLAN

1.1 TAP Statistics

This section describes the configuration and view of the statistics of the flow in ingress interface.

Click “Tap Management”>“TAP Statistics”to enter the main page, this page can view the flow statistics of all interfaces , as shown in Figure.

Port List									
•eth-0-1	eth-0-2	eth-0-3	eth-0-4	eth-0-5	eth-0-6	eth-0-7	eth-0-8	eth-0-9	eth-0-10
eth-0-11	eth-0-12	eth-0-13	eth-0-14	eth-0-15	eth-0-16	eth-0-17	eth-0-18	eth-0-19	eth-0-20
eth-0-21	eth-0-22	eth-0-23	eth-0-24	eth-0-25	eth-0-26	eth-0-27	eth-0-28	eth-0-29	eth-0-30
eth-0-31	eth-0-32	eth-0-33	eth-0-34	eth-0-35	eth-0-36	eth-0-37	eth-0-38	eth-0-39	eth-0-40
eth-0-41	eth-0-42	eth-0-43	eth-0-44	eth-0-45	eth-0-46	eth-0-47	eth-0-48	eth-0-49	eth-0-50
eth-0-51	eth-0-52	eth-0-53	eth-0-54						

Flow Statistics									
Interface:									

Figure 1-1 TAP statistics

1.1.1 Flow statistics of interface

Port List									
•eth-0-1	eth-0-2	eth-0-3	eth-0-4	eth-0-5	eth-0-6	eth-0-7	eth-0-8	eth-0-9	eth-0-10
eth-0-11	eth-0-12	eth-0-13	eth-0-14	eth-0-15	eth-0-16	eth-0-17	eth-0-18	eth-0-19	eth-0-20
eth-0-21	eth-0-22	eth-0-23	eth-0-24	eth-0-25	eth-0-26	eth-0-27	eth-0-28	eth-0-29	eth-0-30
eth-0-31	eth-0-32	eth-0-33	eth-0-34	eth-0-35	eth-0-36	eth-0-37	eth-0-38	eth-0-39	eth-0-40
eth-0-41	eth-0-42	eth-0-43	eth-0-44	eth-0-45	eth-0-46	eth-0-47	eth-0-48	eth-0-49	eth-0-50
eth-0-51	eth-0-52	eth-0-53	eth-0-54						

Flow Statistics									
Interface: eth-0-1									

Flow Name: flow1									
Match Rule : sequence-num 10 permit any src-ip any dst-ip any Match Bytes : 200 Match Packets : 2									
Total Match Bytes : 200 Total Match Packets: 2									

Figure 1-1 flow statistics



NOTE It only displays the flow statistics of interface which applies flow in the tap-group.

2 Tool

1.1 Overview

This chapter mainly describes Ping, Traceroute, restart / save the use and information on the page, the user can use these tools for basic network diagnosis.

1.1 Ping

Users can use ping to detect and diagnose current network conditions and analyze the resulting information.

1.1.1 Tool use

Click “Tool”>“Ping”to enter the ping tool main page, ping the use of options shown in Figure, click “OK” to use.

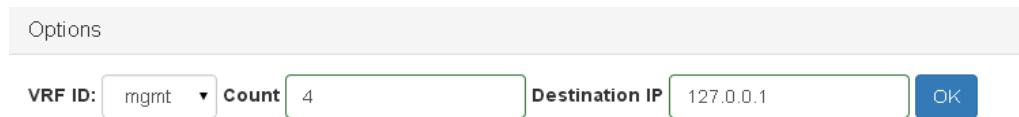


Figure 1-1 Ping tool


Table 1-1 Ping tool configuration

Configuration item	Description
VRF ID	Configure the vrf where the ping packet is specified, default mgmt

Count	Configure the specified number of pings
Destination IP	Configure the destination IP address

1.1.1 Console information

And then use the ping tool, the ping results and then the lower part of the display, as shown in Figure.

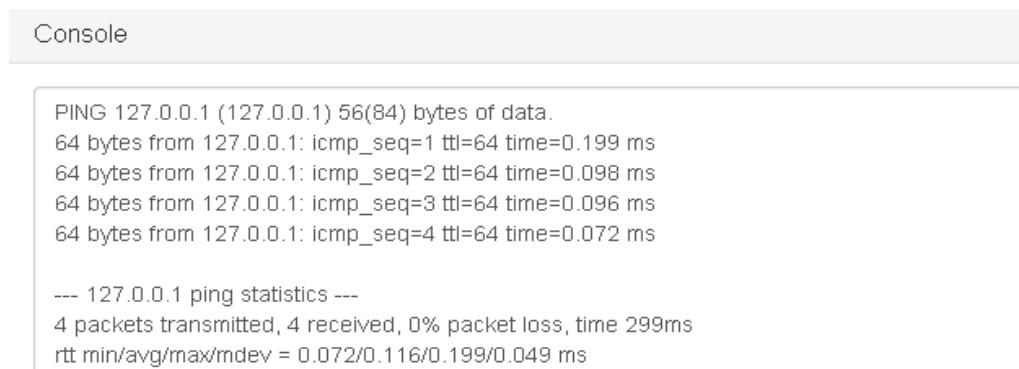

```

Console

PING 127.0.0.1 (127.0.0.1) 56(84) bytes of data.
64 bytes from 127.0.0.1: icmp_seq=1 ttl=64 time=0.199 ms
64 bytes from 127.0.0.1: icmp_seq=2 ttl=64 time=0.098 ms
64 bytes from 127.0.0.1: icmp_seq=3 ttl=64 time=0.096 ms
64 bytes from 127.0.0.1: icmp_seq=4 ttl=64 time=0.072 ms

--- 127.0.0.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 299ms
rtt min/avg/max/mdev = 0.072/0.116/0.199/0.049 ms

```

Figure 1-1 Ping console information

1.1 Traceroute

Traceroute is a small tool to confirm that the message passes through the destination IP address of the router. Its implementation principle is to determine the destination route by sending ICMP packets of different TTL.

1.1.1 Tool use

Click “Tool”-> “Traceroute”to enter the ping tool main page, ping the use of options shown in Figure, click “OK” to use.



Options						
VRF ID:	mgmt	Destination IP	127.0.0.1	timeout/second	5	OK

Figure 1-1 traceroute tool

Table 1-1 traceroute tool configuration

Configuration item	Description
VRF ID	Configure the vrf where the ping packet is specified, default mgmt
Destination IP	Configure the destination IP address
Timeout/second	Configure timeout time / sec

1.1.1 Console information

And then use the Traceroutetool, the t result is displayed at the bottom of the option, as shown in Figure.

```

Console

traceroute to 127.0.0.1 (127.0.0.1), 30 hops max, 38 byte packets
  1 localhost (127.0.0.1)  0.037 ms  0.023 ms  0.015 ms

```

Figure 1-1 traceroute console information

1.1 Reboot / Save

Click “Reboot/Save” to enter the reboot / save main page, as shown in Figure.



Figure 1-1 reboot/save parameters

Table 1-1 reboot/save configuration

Configuration item	Description
Reboot	Reboot the switch
Save	Save the current configuration to the configuration file

Save and reboot	Save the current configuration to the configuration file and restart the switch
-----------------	---

For questions, please contact Garland Technology Support at:
8AM-9PM (CST) Monday - Friday (Except for observed US Holidays)
Tel: 716.242.8500 Online: www.garlandtechnology.com/support