


PB100G32AC Quick Start Guide:

- 1.) Serial port setup: (use the black serial cable that comes with the unit)
Connect the serial cable to the Con and an Ethernet cable to the MGMT port.
Serial port setup is: 115200/N/8/1
- 2.) Power the packet broker on and wait for boot to finish.
Login to the CLI:
OVSlogin: admin/gtadmin1
- 3.) Set the IP of the management Ethernet port:
admin@OVS\$ sudo ifconfig eth0 192.168.1.31/24 (24=netmask; 24 ones = 255.255.255.0)
- 4.) Go to an approved web-browser, (Firefox or Chrome) and use the ip address from step 3:
192.168.1.31:8181 (8181 = port number)
- 5.) Log into the GUI using the same credentials as in step 2.

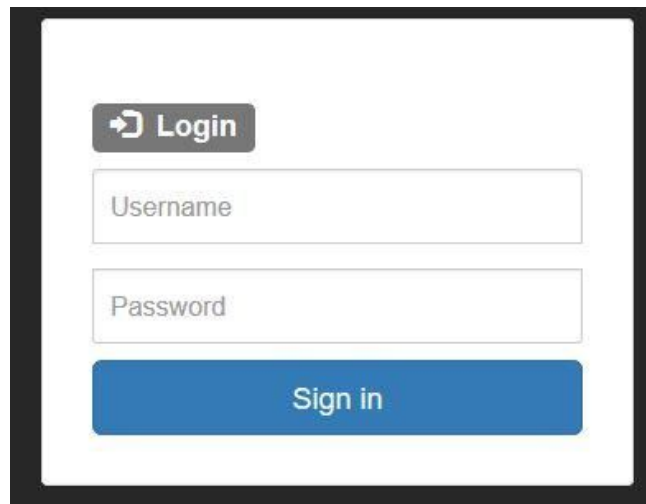

For questions, please contact Garland Technical Support at:
8 AM – 9 PM (CST) Monday – Friday (except for observed US Holidays)
+1.716.242.8500 support@garlandtechnology.com