

# MPO/MTP® Multi-mode Passive Fiber Network TAP

40G/100G-SR4 or 100G-SR10 | Portable




Network test access points (TAPs) are hardware tools that allow you to monitor your network. All fiber breakout TAPs are passive, purpose-built hardware devices that make a 100% copy of your network's data allowing your monitoring tools to see every bit, byte and packet.®

Passive TAPs are non-powered devices that will not cause the live network devices to lose link between one another if power is lost.

## Key Features

- Multi-mode fiber in MTP-12 and MTP-24
- 100G-SR4 supports 4 Channels of 25G in each direction
- New Prism based technology that reduces bit errors on OM3 + OM4 + OM5 applications, providing 100% utilization.
- MTP® brand connectors for lowest dB loss
- 1U rack mount kit holds up to 4 modules, each module can have 1, 2 or 3 portable TAPs
- Portable, Plug & Play easy installation
- No power source required
- Tested and Certified
- Made, tested and certified in the USA

## Network Flow

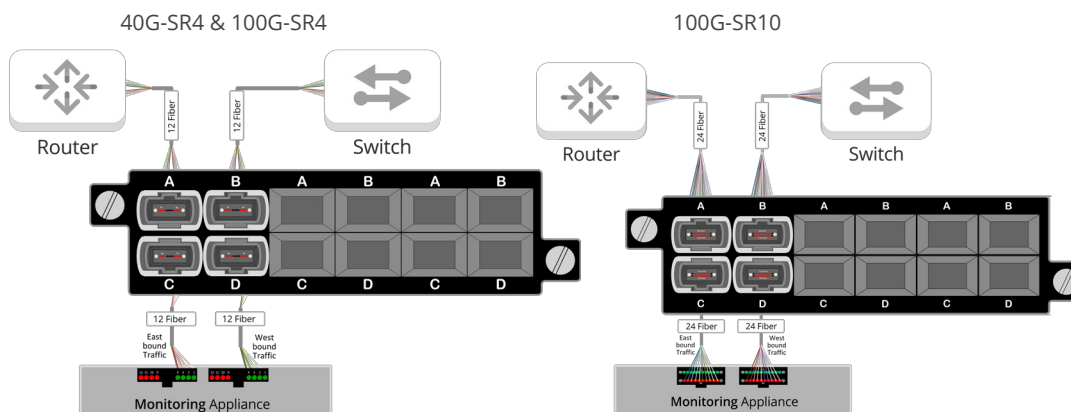

## APPLICATIONS:

- > Network & Application Monitoring
- > Network & Application Analysis
- > Network & Application Performance

+ Breakout Mode is ideal when utilization is very high and packet loss is not an option.

## SOLUTIONS:

Passive optical TAPs are ideal for:

- IDS Intrusion Detection Systems
- APM Application Performance Monitoring
- Lawful Intercept
- Packet Capture
- Network Packet Broker
- DPI Deep Packet Inspection
- Network Analyzer
- Forensics

## Competitive Edge

- New Prism based technology that reduces bit errors on OM3 + OM4 applications, providing 100% utilization.
- Features MTP® brand connections for lowest dB loss per connector.
- Tested and Certified



## Have Questions?

sales@garlandtechnology.com  
+716.242.8500  
garlandtechnology.com

# MPO/MTP® Multi-mode Passive Fiber Network TAP

40G/100G-SR4 or 100G-SR10 | Portable

Model #	Network Speed	Ports	# of TAPS	Split Ratio*	Wavelengths	Media	Connector/Mode
<b>RMP-1U</b>			1U Rack Mount Kit - Hold up to 4 Modules, each Module can have 1, 2, 3 or 4 TAPS				
<b>OM4501-SR4B</b>	40G/100G		1	50/50	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM4701-SR4B</b>	40G/100G		1	70/30	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM5501-SR4B</b>	40/100/400G*		1	50/50	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM5701-SR4B</b>	40/100/400G*		1	70/30	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM4502-SR4B</b>	40G/100G		2	50/50	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM4702-SR4B</b>	40G/100G		2	70/30	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM5502-SR4B</b>	40/100/400G*		2	50/50	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM5702-SR4B</b>	40/100/400G*		2	70/30	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM4503-SR4B</b>	40G/100G		3	50/50	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM4703-SR4B</b>	40G/100G		3	70/30	850nm	Fiber-OM3/OM4	MTP-12 Multi-Mode Fiber
<b>OM5503-SR4B</b>	40/100/400G*		3	50/50	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM5703-SR4B</b>	40/100/400G*		3	70/30	850-950nm	Fiber OM5	MTP-12 Multi-Mode Fiber
<b>OM4501-100GSR10A</b>	100G		1	50/50	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber
<b>OM4702-100GSR10A</b>	100G		2	70/30	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber
<b>OM4503-100GSR10A</b>	100G		3	50/50	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber
<b>OM4701-100GSR10A</b>	100G		1	70/30	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber
<b>OM4502-100GSR10A</b>	100G		2	50/50	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber
<b>OM4703-100GSR10A</b>	100G		3	70/30	850nm	Fiber-OM3/OM4	MTP-24 Multi-mode Fiber

Split ratios available in 50/50; 60/40; 70/30; 80/20 and 90/10

\*100G SWDM4

## Additional Specifications

### Multi-mode

**Fiber Type:** OM4 Clearcurve BIF

900um buffer

**Directivity:** ≥40dB

**Temperature:** -40 to +85C

**Packaging:** Stainless steel tube,  
3.05mm (dia) x 55mm (len)

### Additional

**Dimensions:** (HxWxD): 1.72" x 3.9" x 6.8"  
(43.69mm x 99.06mm x 172.72mm)

**Weight:** 1.45 lbs (0.66 kg)

**Ambient Temperature:** 0C to +40C / +32F to +104F

**Storage Temperature:** -20C to +70C / -4F to +158F

**Humidity:** 90% non-condensing

\*There is no power needed for these TAPS

### Optical Fiber Insertion Loss for OM4 with 850nm

Splitter: Multi-Mode MTP Connector*		
Split Ratio	Network Port	Monitor Port
50/50	3.8 dB	3.8 dB
70/30	1.80 dB	6.6 dB
Splitter plus loss with one mated pair**		
Split Ratio	Network Port	Monitor Port
50/50	4.1 dB	4.1 dB
70/30	2.5 dB	7.30 dB

\* Measured loss through splitter only \*\* Measured loss through splitter; plus one mated pair (two fibers terminated and connected together with a fiber optic coupler). For methodology read: Tech Notes on [Measuring Budget Light Loss](#).



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2019 Garland Technology LLC. All Rights Reserved