

# Multi-mode Passive Fiber Network TAP

1G/10/25/40/100G | Portable




Network test access points (TAPs) are hardware tools that allow you to monitor your network. All fiber breakout TAPs are passive, purpose-built hardware devices that make a 100% copy of your network's data allowing your monitoring tools to see every bit, byte and packet.®

Passive TAPs are non-powered devices that will not cause the live network devices to lose link between one another if power is lost.

## Key Features

- 100% network visibility
- 100% secure and invisible; no IP address; no Mac address; cannot be hacked
- Passes physical layer errors
- Supports Breakout Mode
- Supports Jumbo frames
- 1U rack mount kit holds up to 4 modules, each module can have 1, 2, 3 or 4 TAPs
- Plug & Play easy installation, no configuration; no power source required
- Made, tested and certified in the USA

## Network Flow

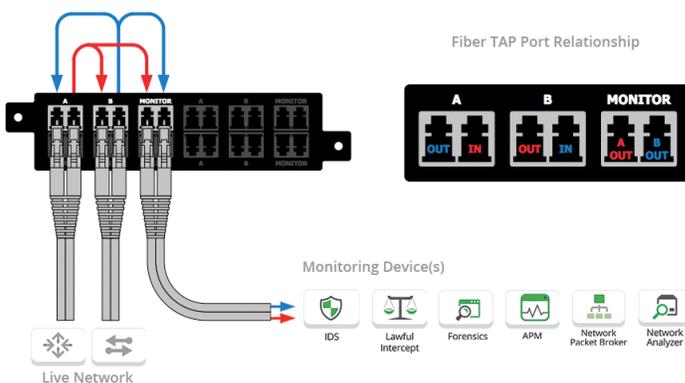

### APPLICATIONS:

- Network & Application Monitoring
- Network & Application Analysis
- Network & Application Performance

+ Breakout Mode is ideal when utilization is very high and packet loss is not an option.

### SOLUTIONS:

Passive optical TAPs are ideal for:

- IDS  
Intrusion Detection Systems
- APM  
Application Performance Monitoring
- Lawful Intercept  
Lawful Intercept
- Network Packet Broker  
Packet Capture
- DPI  
Deep Packet Inspection
- Network Analyzer  
Network Analyzer
- Forensics  
Forensics

### Competitive Edge

- New Prism based technology that reduces bit errors on OM3 + OM4 applications, providing 100% utilization.
- Tested and Certified



### Have Questions?

sales@garlandtechnology.com  
+716.242.8500  
garlandtechnology.com

# Multi-mode Passive Fiber Network TAP

1G/10/25/40/100G | Portable

Model #	Network Speed	Ports	# of TAPs	Split Ratio*	Wavelengths	Media	Connector/Mode
RMP-1U			1U Rack Mount Kit - Hold up to 4 Modules, each Module can have 1, 2, 3 or 4 TAPs				
OM1501	1/10G		1	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM1701	1/10G		1	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM3501	1/10/25G		1	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber
OM4501	1/10/25G		1	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM4701	1/10/25G		1	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM5501	1/10/25/40/100G*		1	50/50	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM5701	1/10/25/40/100G*		1	70/30	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM1502	1/10G		2	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM1702	1/10G		2	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM3502	1/10/25G		2	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber
OM4502	1/10/25G		2	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM4702	1/10/25G		2	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM5502	1/10/25/40/100G*		2	50/50	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM5702	1/10/25/40/100G*		2	70/30	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM1503	1/10G		3	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM1703	1/10G		3	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM3503	1/10/25G		3	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber
OM4503	1/10/25G		3	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM4703	1/10/25G		3	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM5503	1/10/25/40/100G*		3	50/50	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM5703	1/10/25/40/100G*		3	70/30	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM1504	1/10G		4	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM1704	1/10G		4	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber
OM3504	1/10/25G		4	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber
OM4504	1/10/25G		4	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM4704	1/10/25G		4	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber
OM5504	1/10/25/40/100G*		4	50/50	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber
OM5704	1/10/25/40/100G*		4	70/30	850-950nm	Fiber OM5	Fiber-LC-Multi-Mode Fiber

Custom split ratios are available in 60/40, 80/20 or 90/10, please inquire.

\*100G SWDM4

## Additional

**Dimensions:** (HxWxD): 1.72" x 3.9" x 6.8"  
(43.69mm x 99.06mm x 172.72mm)

**Weight:** 1.45 lbs (0.66 kg)

**Ambient Temperature:** 0C to +40C / +32F to +104F

**Storage Temperature:** -20C to +70C / -4F to +158F

**Humidity:** 90% non-condensing

\*There is no power needed for these TAPs

## Multimode

**Fiber Type:** Corning 62.5/125 or 50/125 micron

**Directivity:** ≥40dB

**Temperature:** -40 to +85C

**Packaging:** Stainless steel tube, 3.05mm (dia) x 55mm (len)

## Optical Fiber Insertion Loss for OM1, OM2, OM3 with 850/1300nm

## Optical Fiber Insertion Loss for OM4 with 850nm

Splitter: Multi-Mode with LC Connector*			Splitter: Multi-Mode with LC Connector*		
Split Ratio	Network Port	Monitor Port	Split Ratio	Network Port	Monitor Port
50/50	3.7 dB	3.7 dB	50/50	3.8 dB	3.8 dB
70/30	2.1 dB	6.1 dB	70/30	1.8 dB	6.6 dB
Splitter plus loss with one mated pair**			Splitter plus loss with one mated pair**		
Split Ratio	Network Port	Monitor Port	Split Ratio	Network Port	Monitor Port
50/50	4 dB	4 dB	50/50	4.1 dB	4.1 dB
70/30	2.4 dB	6.4 dB	70/30	2.1 dB	6.9 dB

\*Measured loss through splitter only \*\*Measured loss through splitter; plus one mated pair (two fibers terminated and connected together with a fiber optic coupler). For methodology read: Tech Notes on [Measuring Budget Light Loss](#).



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2019 Garland Technology LLC. All Rights Reserved