

Bypass Network TAPs with Failsafe

1G | Portable | Remote management or manual programming




Network test access points (TAPs) are hardware tools that allow you to monitor and access your network. Bypass TAPs (active TAPs) are typically used with in-line security appliances such as next generation firewalls and intrusion prevention systems. All bypass TAPs are purpose-built hardware devices that let you see every bit, byte and packet.®

Bypass TAPs are used to connect a monitored network segment to an active in-line appliance and monitor the appliance's health. If your appliance goes off line for any reason the Bypass TAP will automatically switch to 'bypass mode' keeping your network up while you resolve the issue.

Key Features

- Easy remote access and management with GUI/CLI card.
- Portable, Plug & Play.
- Heartbeat Packets are sent out of each monitoring port. If the heartbeat packets are not received from either direction, then Bypass Mode takes effect. Heartbeat packets are never sent out onto the live network.
- Network Failsafe recognizes power outages and automatically closes the relay circuitry in less than eight milliseconds then reconnects the two network devices connected to ports A and B.
- Bypass TAPs are fully configurable and support multiple modes: breakout, aggregation, regeneration/SPAN and bypass.
- Power over Ethernet (PoE+) passthrough optional.
- Supports Jumbo frames.
- Supports link failure propagation (LFP).
- Passes physical errors
- 100% secure and invisible; no IP address, no Mac address; cannot be hacked.
- Made, tested and certified in USA.

Network Flow

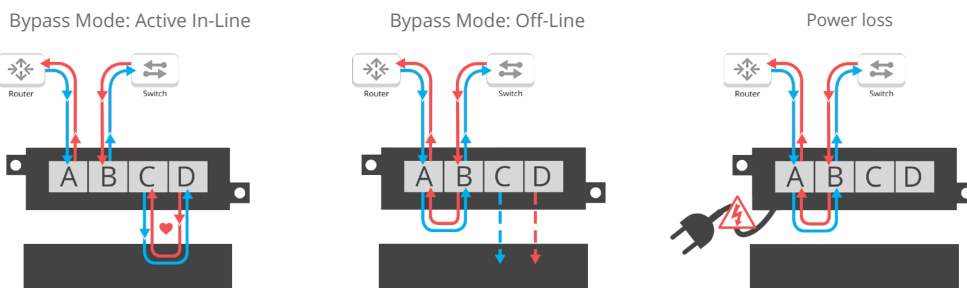

APPLICATIONS:

- Network security and monitoring of in-line appliances.
- For remote monitoring/access of in-band appliances.
- Take your in-band appliance off line without interrupting data traffic for: Updates, Maintenance, Troubleshooting.

SOLUTIONS:

Portable Bypass TAPs are ideal for:

- Next-Generation Firewalls
- Data Leakage Prevention
- Intrusion Prevention System
- Web Application Firewall
- Distributed Denial of Service Appliances
- Security Information and Event Management (SIEM)

Competitive Edge

- Portable, Plug & Play design
- Exclusive remote management
- Supports breakout, aggregation, regeneration and bypass modes
- Bypass TAP Invented by Jerry Dillard, CTO and Co-Founder
- Tested and Certified




Have Questions?

sales@garlandtechnology.com
+716.242.8500
garlandtechnology.com

Bypass Network TAPs with Failsafe

1G | Portable | Remote management or manual programming

Model #	Network Speed	Media		Modes					Packet Injection Support*	PoE Support
		Network	Monitor	Breakout	Filtering	Aggregation	Regen/ SPAN	Bypass		
RMP-1U		1U Rack Mount Kit - Hold up to 4 Portable TAPs								
Remote Management										
P1GCCBPE	100/1000M	2 RJ-45 Copper	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
PIGCSBPE	100/1000M	2 RJ-45 Copper	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No
P1GCCBPPOE+E	100/1000M	2 RJ-45 Copper	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	Yes
P1GCSBPPOE+E	100/1000M	2 RJ-45 Copper	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	Yes
P1GMCBPE	1G	2 SX Multi-mode	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
P1GMSBPE	1G	2 SX Multi-mode	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No
P1GSCBPE	1G	2 LX Single-mode	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
P1GSSBPE	1G	2 LX Single-mode	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No
Manual Programming										
P1GCCBP	100/1000M	2 RJ-45 Copper	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
P1GCSBP	100/1000M	2 RJ-45 Copper	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No
P1GCCBPPOE+	100/1000M	2 RJ-45 Copper	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	Yes
P1GCSBPPOE+	100/1000M	2 RJ-45 Copper	2 SFP	Yes	No	Yes	Yes	Yes	Yes	Yes
P1GMCBP	1G	2 SX Multi-mode, Fiber-LC	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
P1GMSBP	1G	2 SX Multi-mode, Fiber-LC	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No
P1GSCBP	1G	2 LX Single-mode, Fiber-LC	2 RJ-45 Copper	Yes	No	Yes	Yes	Yes	Yes	No
P1GSSBP	1G	2 LX Single-mode, Fiber-LC	2 SFP	Yes	No	Yes	Yes	Yes	Yes	No

*Packet injection in Aggregation mode only

Additional Specifications

Voltage: 5 DC

Current: 1.6 Amps

Max. Consumption: 8 Watts

Ambient Temp.: 0C to +40C / +32F to +104F

Operating Re. Humidity: 90% non-condensing

Dimensions (HxWxD):

1.15" x 3.9" x 6.5"

(29.21mm x 99.06mm x 165.10mm)

Weight: 0.7lbs (0.317kg)



Back view of portable TAP with serial and ethernet remote management.



Back view of portable TAP with manual management.



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2017 Garland Technology LLC. All Rights Reserved