



See every bit, byte, and packet®

Unmanaged, Powered Fiber TAPs

Portable Single Mode Fiber TAPs for 1G Networks



P1GSCAS



P1GSSAS

A Network TAP (test access point) is a hardware device that allows you to monitor and secure your network traffic by copying packets from a network link without impacting or compromising network integrity.

Garland Technology's Unmanaged, Powered Single Mode Fiber Network TAPs provide full duplex packet visibility in 1G networks.

A portable, Powered Single Mode Fiber TAP is placed between two (2) network devices to mirror (or copy) the network traffic flowing through those devices. The TAP is unmanaged in that it is configured with DIP switches on the back of the TAP. The TAP supports breakout, aggregation and regen/SPAN modes. It is ideal for deployments requiring media conversion. The TAP is passive and does not alter the traffic flow in any way. Single Mode Fiber TAPs are designed for long-range connectivity environments.

PROTECT

- 100% secure and invisible; no IP address, no MAC address; cannot be hacked
- Passes physical errors

ENHANCE

- Media conversion: 1G-LX to copper, 1G-LX to SFP
- SNMP V2c/V3
- Jumbo frames supported

SIMPLIFY

- Portable, Plug & Play
- Easy configuration; switches on back of TAP

COUNTRY OF ORIGIN: USA

- Portable and durable, metal chassis
- TAA Compliant

KEY FUNCTIONS

Breakout Mode

Copy both directions of network traffic and then send the copies out the two separate monitoring ports.

Aggregation Mode

Combine multiple copies of network traffic out one monitoring port.

Regeneration/SPAN Mode

Creates multiple copies of network data to support multiple devices from a single tapped link. This allows you to send the same data to multiple destinations.

Available Split Ratios

50/50, 60/40, 70/30, 80/20, 90/10


For custom split ratios, please inquire.



sales@garlandtechnology.com | +1 716.242.8500 | GarlandTechnology.com

HARDWARE KEY

- 1.**One (1) 1G LX Single Mode Fiber TAP **2.**Two (2) 1G Copper or SFP+ Ports **3.**Dual Power Supplies
4.Fan **5.**DIP Switch

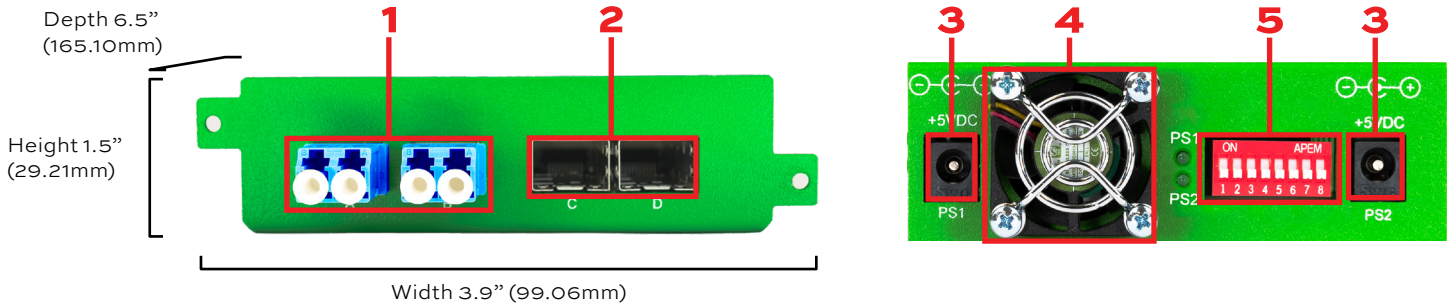

SPECIFICATIONS

Dimensions: (HxWxD): 1.15" x 3.9" x 6.5"
 (29.21mm x 99.06mm x 165.10mm)

Ambient Temperature: 0 to +40°C / +32 to +104°F

Storage Temperature: -20 to +70°C / -4 to +158°F

Connector: 1G-LX Single Mode fiber

Weight: 0.7 lbs (0.32kg)

Voltage: 5V DC


Current: < 1.6 Amps

Max. Consumption: < 8 Watts

Operating Re. Humidity: 90% non-condensing

Ordering Information

Product Number	Network Speed	Fixed Ports	Split Ratio
P1GSCA	1G	(2) 1G-LX-Single Mode Network Ports (2) Copper Monitoring Ports	50/50
P1GSSA	1G	(2) 1G-LX-Single Mode Network Ports (2) SFP Monitoring Ports	50/50
RMP-1U	1U Rack Mount Plate, holds 4 portable TAPs.		

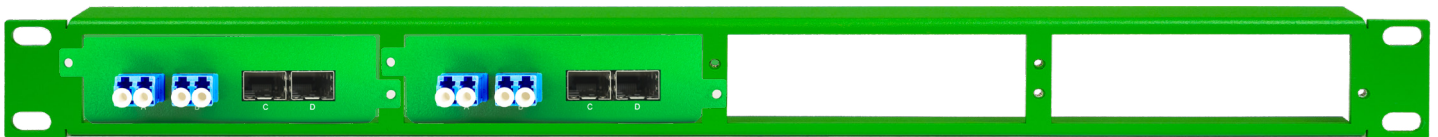

Have Questions?

sales@garlandtechnology.com | +1 716.242.8500 | GarlandTechnology.com

GARLAND
 TECHNOLOGY
 See every bit, byte, and packet®