


M1GC Reset Username and Password

Use this procedure to reset the admin username and password on a M1GC or a device that incorporates a M1GC / Software Version 1.0.50 and higher.

To reset the admin username and password to “admin/gtadmin1”, Perform the following procedure.

- 1) Connect a Serial cable from a COM port on the laptop or PC to the Serial Interface on the unit.
- 2) Launch Putty and configure the Serial connection options as follows.

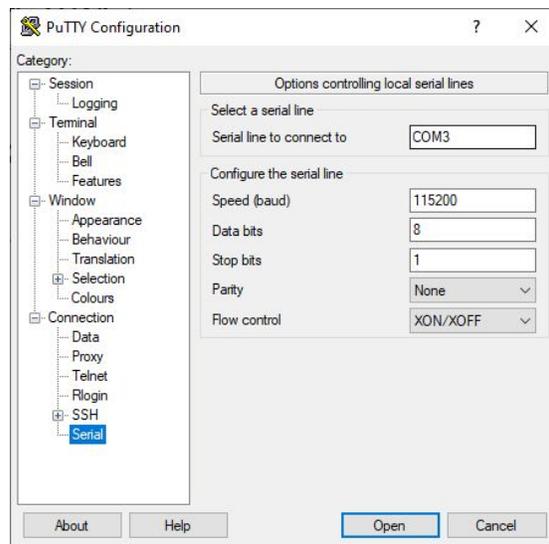

- 3) Power cycle the device. Type the following command when the device first starts to boot. There is only about a 3-4 second window where we will accept this command.

```
Noboot
```

- 4) At the U-Boot# prompt, type the following two commands:

```
U-Boot# setenv mmcargs ${mmcargs} resetadminuser
```

```
U-Boot# run bootcmd
```

- 5) When the device boots up, the system will reset the admin username and password to the default setting (i.e. admin/gtadmin1).

No other usernames/passwords or configuration information will be affected.

For questions, please contact Garland Technology Support at:
8AM-9PM (CST) Monday - Friday (Except for observed US Holidays)
Tel: 716.242.8500 Online: www.garlandtechnology.com/support