

The FAB Packet Broker System

Supports: Filtering, Aggregating, and Load Balancing Integrated System

Monitor and Manage Your Network



The FAB Packet Broker System filters, aggregates and load balances your network's traffic for monitoring and management of your out-of-band network tools. This 1U box allows you to aggregate network traffic, load balance at high speeds (1G, 10G, 40G) and connect monitoring tools to multiple segments of your network. Garland's FAB is a full feature, all-in-one device and has no hidden licensing fees.

Key Features

- Aggregate your network traffic to a single tool
- Load balance at high network speeds across multiple appliances
- Connect tools to multiple network segments
- Any-to-Any configurations: 1Gb, 10Gb, and 40Gb
- All ports can be configured as input ports or monitoring ports
- Remote Syslog, NTP
- Remote network management (RMON) with GUI or CLI interface
- TACACS and RADIUS remote user authentication
- Ingress and egress counters
- Copper SFPs support 10/100/1000 base
- Supports jumbo frames
- AC or DC hot swappable power supplies
- 1 Management port; 1 Console port
- All features are included, there are no per-port licensing fees
- Made in the USA

Solutions

TAP Multiple 1G/10G links and filter, aggregate and load balance to a single 40G tool.
Monitor 40G links and filter, aggregate and load balance to multiple 1G or 10G tools.



Wireshark



Network Analyzer



Intrusion Detection System



Application Performance Monitoring



Lawful Intercept



Network Packet Broker



Forensics

Packet Capture

Data Forensics

APPLICATIONS:

- High density solution
- Packet analysis
- Root cause analysis
- Historical lookback
- Validate policy changes

Competitive Edge

- Session aware load balancing
- MPLS heading stripping
- VLAN tagging and stripping
- Remote management with CLI or GUI



FILTERS:

- User definable filters of Layer 2, 3 and 4
- Filters: IPv4/IPv6, L4Port, TCP, UDP, VLAN, MAC, Ethertype, IP Protocol, MPLS labels
- VLAN tag and MPLS header stripping
- Full line rate filtering
- Port locking
- Ingress and egress filtering

TECHNOLOGY PARTNERS:

Garland Technology's FAB Packet Broker System has been approved for use by:




Have Questions?

sales@garlandtechnology.com
+716.242.8500
garlandtechnology.com

The FAB Packet Broker System

Supports: Filtering, Aggregating, and Load Balancing Integrated System

Monitor and Manage Your Network

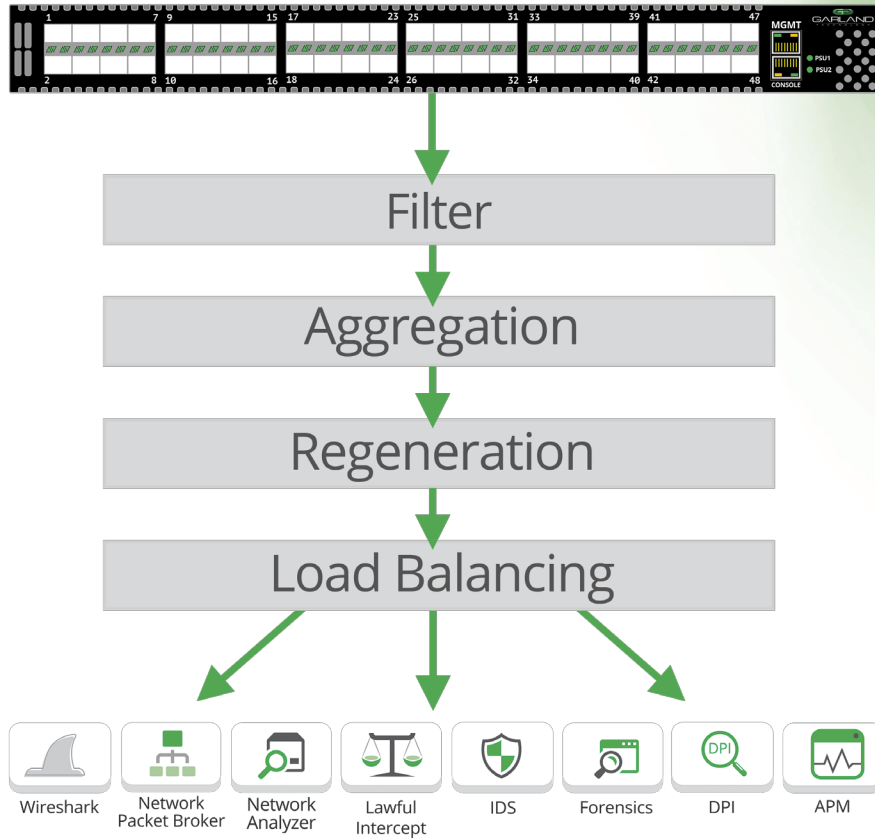

Filtering

Filtering & Tagging

The FAB's filters direct the flow of traffic, filters can: deny traffic, pass all traffic, pass traffic by certain criteria and tag packets. The FAB's VLAN filters can tag packets, remove tags from packets and truncate packets.



Aggregation

Aggregation

- Any to Any configuration
- Easily monitor EtherChannel (bonded links)
- Aggregate network traffic to single or multiple tools



Load Balancing

Load Balancing

Session aware load balancing

- 1G to 1G • 10G to 1G • 40G to 1G
- 1G to 10G • 10G to 10G • 40G to 10G
- 1G to 40G • 10G to 40G • 40G to 40G



Regeneration

Regeneration

- Deliver data to all monitoring tools
- Double your data ports with passive fiber TAPs in 1G/10G/40G


The FAB Packet Broker System

Supports: Filtering, Aggregating, and Load Balancing Integrated System


Monitor and Manage Your Network

Use Cases

Monitor your 40G Links and Filter, Aggregate and Load Balance to multiple 1G or 10G Monitoring Solutions

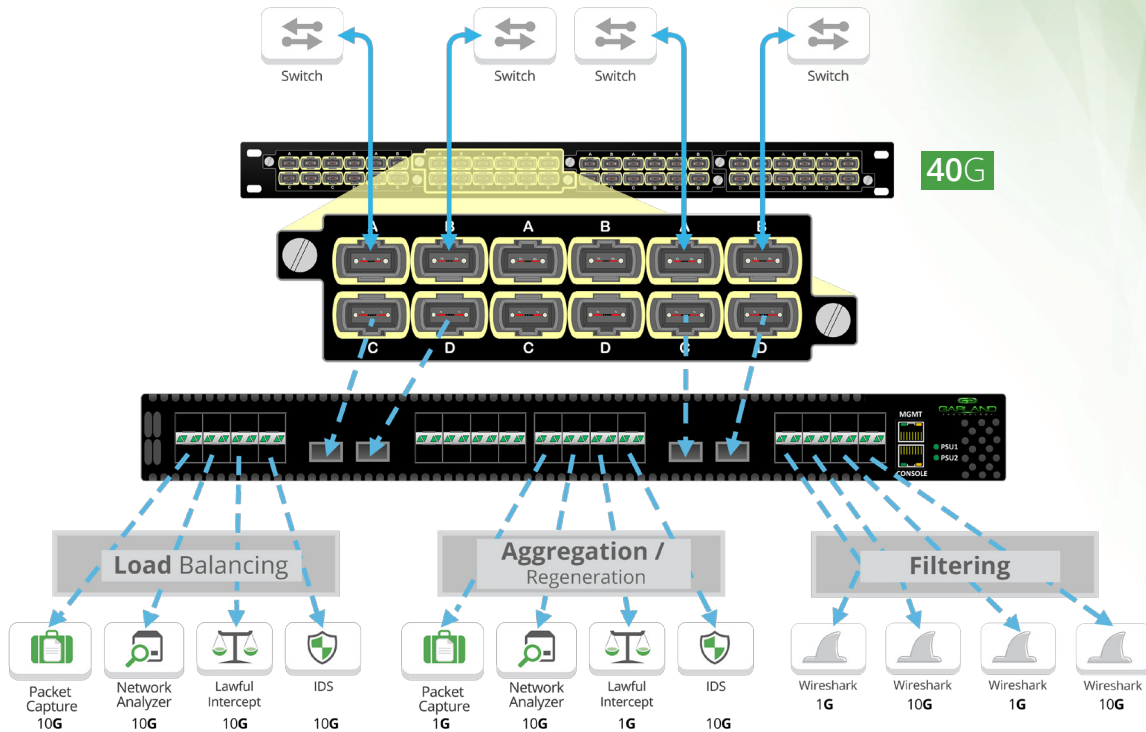

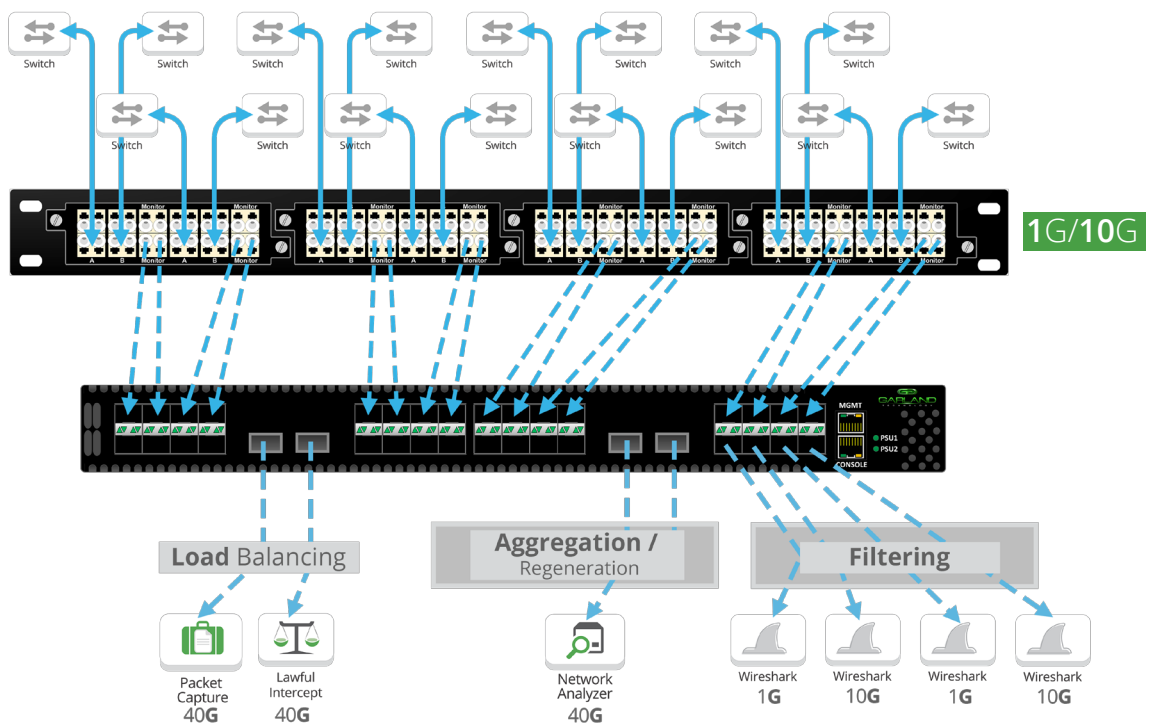





TAP Multiple 1G/10G Links and Filter, Aggregate and Load Balance to a single 40G Monitoring Tool



The FAB Packet Broker System

Supports: Filtering, Aggregating, and Load Balancing Integrated System

Monitor and Manage Your Network

Filtering TAP options							
Model #	Ports	Network Speed	SFP/SFP+ Ports	Copper Ports	QSFP Ports (40G)	Power Consumption	Dual Hot Swappable Power Supplies*
FAB10G8AC		1G/10G	8 SFP/SFP+	N/A	N/A	156W	AC
FAB10G16AC		1G/10G	16 SFP/SFP+	N/A	N/A	166W	AC
FAB10G24AC		1G/10G	24 SFP/SFP+	N/A	N/A	176W	AC
FAB10G48AC		1G/10G	48 SFP/SFP+	N/A	N/A	195W	AC
FAB10G40AC		1G/10G	16 SFP/SFP+	24 10/100/1000M Copper	N/A	160W	AC
FAB40G36AC		1G/10G/40G	32 SFP/SFP+	N/A	4 - 40G QSFP	195W	AC

Power Supply options	
PS10-HS-DC	Hot Swappable DC -48vdc Power Supplies
PS10-HS-AC	Hot Swappable AC Power Supplies (*Two included with each EdgeLens order)

(2) Two power supplies are required for each chassis

Available Pluggables & Cables:	
Model #	Description
SFPTX	SFP 10/100/1000 Copper RJ-45 Connector
SFPSX	SFP 1000Base-SX Multi-Mode Fiber LC Connector
SFPLX	SFP 1000Base-LX Single Mode Fiber LC Connector
SFP+SR	SFP+ Dual Speed 1 Gigabit-SX / 10 Gigabit-SR Multi-Mode Fiber LC Connector
SFP+LR	SFP+ Dual Speed 1 Gigabit-LX / 10 Gigabit-LR Single Mode Fiber LC Connector
SFP+ER	SFP+ 10Gigabit-ER Single-Mode Fiber LC Connector
SFP+SR10	SFP+ 10Gigabit-SR Multi-Mode Fiber LC Connector - only supports 10G
SFP+LR10	SFP+ 10Gigabit-LR Multi-Mode Fiber LC Connector - only supports 10G
TWINAX1M*	Twinax Copper Direct Connect Cable SFP+ 10Gigabit 1 Meter



*Also available in 5 and 10 meters.

1U Chassis Specifications:

Max system throughput: 1.44TBPS
 Support for: SFP / SFP+, LS, LR, SX, LX, TX, ER, SR
 Operating Temp.: 0C to 40C / 32F to 104F
 Operating Humidity: 5 to 90%

Dimensions: 1.75"H x 17.25"W x 24.50"D
 (44.45 mm H x 448.15mm W x 622.3mm D)
 Airflow: 200lf/m
 (2) AC Power Supplies included



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2016 Garland Technology LLC. All Rights Reserved