

The Advanced Features supports up to 24 iloop ports. The 24 iloop ports support up to a maximum total bandwidth of 120G. Iloop ports are virtual internal ports that may be used as an ingress or egress entity when creating a TAP Group.


Iloop ports provide the following benefits:

- Allow for a flow (filter and/or action) between a physical port(s) and iloop port
- Allow for a flow (filter and/or action) between an iloop port and physical port(s)

### Create an iloop

1. Select Interface Management.
2. Select iloop.
3. Select + Add iloop.

*The Add iloop panel will appear.*

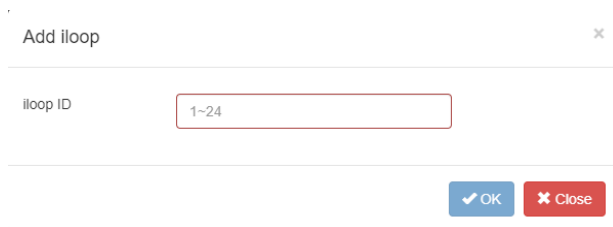

4. Enter the iloop ID, optional (1-24).
5. Select OK.

*The iloop will be displayed.*

iloop Config			+ Add iloop
ID	iloop Name	Options	
1	iloop1	🗑️	

6. Select the Trash Can in the Options column to delete the iloop.